



# CIENTIFIC



# MERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 2004, by Munn & Co.]

Vol. XCI.-No. 26.

NEW YORK, DECEMBER 24, 1904.

SCENTE A CONV



"WAIHANOU," A GIANT CEYSER OF HEW ZEALAND THAT AT TIMES SPURTS MUD AND STEAM TO A HEIGHT OF 1,000 FEBT. (See page 465.)

#### SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO... - Editors and Proprietors

> Published Weekly at No. 361 Broadway, New York

	-
THRMS TO SUBSCRIBERS	
One copy, one year for the United States, Canada, or Mexico \$3. One copy, one year, to any foreign country, postage prepaid, \$6 lits. \$6.	a
	м
THE BUIENTIFIC AMERICAN PUBLICATIONS.	
Scientific American (Katablished 18th)	al.
Smentisic American Supplement (Established 1876) 500	
Scientific American Building Monthly   Barabintos   1865, 2.50 " Scientific American Export Edution (Established 1878) 3.00 "	
The combined subscription rates and rates to foreign countries w	488
be furnished upon application.	M
Remit he nothed or express momes order or by bank deaft or check	
Remit by postal or express money order, or by bank draft or check.  MUNN & CO., Mi Broadway, New York.	
minutes in processing and accompanies and a sound	,

NEW YORK, SATURDAY, DECEMBER 24, 1904.

#### A GREAT PUBLIC IMPROVEMENT.

of the new Chicago subway, which is scheduled to take place next January, provides that city with a system of transportation for freight which will not only prove of immediate relief, and great business utility, to Chicago, but must in the long run re upon other great cities where the congestion of street freight traffic is already a serious problem, and promises to become an intolerable-burden as the years go by. The Chicago subway, as planned, has a total length of 60 miles, of which 22½ miles have been completed and are shortly to be opened as stated above. The road will be used strictly for the haulage of freight, and for this service the road, when fully d, will be provided with several thousand cars nd 150 electric rack locomotives, the locomotives sing small in size, and depending upon a rack rail in the center of the track for securing the neces The new subway is designed to take the place of the horse-drawn trucks in the transporta-tion of freight from the many freight depots to the doors of the various business houses, where the merchan-dise will be unloaded directly from the cars of the subway to the basement floors. Not only so, but the coal for power purposes and the ashes will be Not only so, but brought and removed from the basement in the same way. A special type of car has been built for the subway, of dimensions suitable to the section of the tunnel, and capable of carrying a load of 15 tons. The subway is constructed in two sizes. The main lines nd below the principal streets of tricts served are 11 feet 234 inches in width and 12 feet 6 inches in height, while the branch lines which serve the intersecting streets are 6 feet in width and 7 ches in height.

here is the practical realization of a scheme which has frequently been suggested as the best so-lution for the crowded freight traffic of the busiest portions of New York city. The district in Chicago that will be most richly benefited is a section less than two miles square, in which is included all of the great freight stations, and in this section is located the principal shopping district. A freight system applied to New York would involve the construction of trunk lines below the streets bordering the East and North rivers, with a system of feeder lines running below the crossown streets to serve the business houses. Such a system would not only serve to relieve the too narrow troos streets of the slow-moving and bulky trucks that incumber them and so badly congest trafbut it would mean the clearing from the sidewalks s of freight which now incumbers them and renders the progress of the foot passengers not merely exasperatingly 'slow, but, as several fatal accidents have shown, positively dangerous

#### A CAWARD AND ITS REPUTATION.

was cabled recently from England, to the effect that the turbines of the transatiantic steamer "Victorian" had failed on trial to give the expected results. As a matter of fact, not even in the ship at the time the turbines were the cable was published. In view of this attempt to prejudice the reputation of the coming prime mover, the recent publication by the British navy of the re sults of a series of comparative trials of identical eruleers fitted with reciprocating engines and tur-bines is very timely, for they show that so far from there being any indications that marine turbines will be a failure, there is every reason to expect that they will prove a success so brilliant as to relegate the reciprocating marino steam engine, at least as the motive power of high-speed vessels, to the limbo of cutbuilt and discarded mechanisms.

Now this is a pretty strong statement; but our caders will agree that it is justified by the extraordinary results attained in the first authentic and absoetitive trial of turbines against recipro

cating engines as given below. It happened in this way: There have recently been built for the British navy four cruisers of 3,000 tons displacement, 9,000 contract horse-power, and 21% knots contract speed. The vessels were identical in everything except the engines, which in three of the cruisers were of the reciprocating type, and in the fourth—the "Amethyst"—were of the well-known Parsons turbine type. The ships recently completed a series of very exhaustive trials carried out by the trained experts of the British navy, under conditions that preclude any possibility of error, and render the remarkable results secured authentic and reliable. The trials were executed in periods of 24 to 36 hours of continuous steaming, and at speeds of from 10 knots to the maximum of which th spective vessels were capable. At a speed of 14 knots water and coal consumption and the general eco nomies of the two types were about the same. As the speed fell below 14 knots, the reciprocating engine showed proportionately better results, but from 14 upward the turbines proved to be on every point of comparison superior. As the maximum speed was reached, the turbines proved so greatly superior as to render the reciprocating engine by comparison a costly, clumsy, and relatively very inefficient machine. We herewith append a table showing comparative results at the maximum speed at which the two types could be driven:

#### COMPARATIVE SPRICIENCY AT MAXIMUM SPEED.

	Beciprocating Engines.	Turbine Engines.
Displacement of ship, tons	3,000 20,04 9,600 18 3 2,65 2,140	3,000 23,68 14,000 28,0 1.74 3,100

We must confess that while we were prepared to see the turbine show the better results, we were altogether unprepared for the amazing superiority indi-cated by these figures. Regarding the performance at lower speeds, mention should be made of the fact that in the reciprocating engines, the exhaust steam from the auxiliaries (representing at low speed about fourth of the total steam drawn from the boilers) was turned into the receivers of the low-pressure cylinders, an arrangement which, as was shown in our re article on the trials of the cruiser vania," conduces to high economy. In the present trials no such provision was made for the turbine engines; and it is the opinion of the naval engineers that when this has been done the "Amethyst" will compare favorably with the other boats, even at speeds below 14 knots. A study of the details of this test shows that when running at 20 knots the turbine ship required 30 per cent less coal and steam than the others; at 18 knots the saving was about 20 per cent; at 16 knots about 10 per cent; while at 14 knots the consumption was about the same. The gain of more than a knot and a quarter per hour when the engines were being pushed to their limit is particularly important when it is borne in mind that the air pressure in the boiler rooms was only 1.7 against as high as 21/2 inches in the other ships; for this of course means that there is considerably less wear and tear on the boilers. It should further be mentioned that, for cruising at low speeds, the "Amethyst" was fitted with an extra set of turbines, which would not be necessary in merchant ships, which always run at about their maximum speed. Therefore the horse-power per ton weight of machinery would, if this had been a merchant vessel, have been even higher than the 26 horse-power shown in our table. At 18 knots the turbine required about 3 poless steam per horse-power per hour; at 20 knots, 5½ pounds; and at full power, from 7 to 8 pounds less steam, or a reduction of over 30 per cent. So with the consumption, although at 10 knots it was 3.22 pounds as against 2.56 pounds in the reciprocating engines, at 14 knots it was about the same, at 18 knots it was 20 per cent less, at 20 knots 30 per cent less, and at full power the turbine engines d ound per horse-power per hour, or 40 per cent, than did the reciprocating engines. pound per

The most important feature, however, to the naval rehitect and the student of tactics and strategy, is the greatly increased radius of action due to the omy of the motive power. The "Amethyst" type of cruiser carries 750 tons of fuel under normal con ditions; and at 18 knots the turbine ship with this supply could travel 3,600 miles as against 2,770; at 20 knots it could travel 3,160 as against 2,140 miles, while at the remarkable speed of 23.63 knots, the could steam 1,620 miles as against 1,420 miles for the vessel carrying reciprocating engines and making only 22 knots an hour.

Experience has shown that the larger the units in which the turbine is built, the greater are the eco ical results obtained. Therefore it is reasonable to expect that the 18-knot "Victorian" of the Allan Line,

and in a still greater degree the 25-knot liners of the Cunard Company, will show a speed and econo that will greatly surpass even the extraordinary sults obtained in these naval trials.

Further testimony of the efficiency of the turbine for deep-sea work is afforded by the successful voyage of the steamship "Loongana," which made the journey from Glasgow to Australia in 3014 days. details of this trip are found elsewhere in the present

THE CRISIS OF THE RUSSO-JAPANESE WAR.
That the crisis of the Russo-Japanese war should have come and gone without producing so much as a ripple of excitement in the columns of the daily press, is a curious commentary upon the popular estimate of the relative importance of naval events in the Far The very columns that were filled with lengthy telegraphic accounts of the torpedo attack of last Feb ruary, which, after all, merely opened the war, now in the very hour of the crisis of the war, can find no more than two or three inches of space to record the destruction, in one fell blow, of Russia's naval power in the Far East, and the sounding of the death knell to any reasonable hope of the ultimate succ of Muscovite arms.

We showed in a recent article that the defense of Port Arthur, which really meant the defense of the Port Arthur fleet, was the key to the present situation; for it meant the protection and preservation intact of this fleet until it could join hands with the approaching reinforcements under Rodjesvensky. Hence the terrific attacks on 203-Meter Hill, the possession of which by the Japanese would afford implacements for heavy naval guns, capable of commanding the an-chorage of the battleships and cruisers that constituted the powerful remnant of the Port Arthur fleet. Unquestionably the struggle for this position the crisis of the present war. Had it proved impregnable, Japanese command of the sea, with every the sand leagues of advance of the Baltic fleet, would have become increasingly imperiled, and the comof the sea once lost, the capitulation of Oyama's Manchurian armies (cut off from their base of supplies) would have been merely a matter of time. The Japanonce in possession of this hill, lost no time in dragging their heavy naval batteries into position, and then commenced what must go down into history as one of the most tragic disasters of any great naval war. There at anchorage lay six modern battleships and cruisers, the very flower of the Russian Asiatic navy, and each representing a money value of from four to six million dollars. Upon the distant hill was a battery of high-powered modern guns, whose gunners, getting the range to a nicety, proceeded to sink the ships in detail. It took but a few hours to send property of a total value of over \$30,000,000 to the bottom, and then for several days the high-explo-sive shells were rained pitilessly upon the helpless ships until they were wrecked beyond any possibility of salvage. The sunken vessels are the battleship "Retvizan:" the battleships "Pobleda" and "Peres-viet," sister vessels to the "Osliabya," now forming part of the Baltic fleet; and the battleship "Poltava," sister to the "Petropavlovsk," which, it will be remem-bered, was sunk early in the war with Admiral Makon board; the fine armored cruiser "Bayan; and the protected cruiser "Pallada." The ' 'Sebasto sister to the sunken "Poltava," being in drydock escaped the Japanese shells, but was subsequently by Togo's torpedo flotilla at her anchora side the harbor.

Now that the Russian fleet has been destroyed, Admiral Togo can send his battleships to Japan for drydocking and general overhauling, leaving his smalle cruisers to maintain the blockade, and prevent the sending in of supply ships. He will have ample time to get his fleet into absolutely first-class condition for the advent of the Baltic fleet-that is, if it ever arrives. For the conviction must now begin to force itself upon the Russian Admiralty that the four modern and two old battleships, and the two still older armored cruisers of the Baltic fleet, will be no match for the four battleships and eight armored cruisers, all of the very latest type, which they will have to confront and sweep out of the way, if they are to break down the sea power of Japan and isolate her Manchurian armies from their base.

Were the personnel of the opposing fleets of equal-skill, daring and general efficiency, the advantage in material would still lie with the Japanese; but hav-ing in view the necessary rawness of the hastily improvised crews of the Haltic fleet, and the lack of morals shown in the North Sea incident, it is not conceivable that they can win any victory over the veterans of the Port Arthur blockade, trained and hardas they will be by more than twelve months of arduous campaigning.

The command of the sea, then, is assured, by all of the laws of probability, to the Japanese, and Ru must now bend her energies to the prosecution of the

campaign on land. There seems to be little to choose between the fighting qualities of the average Japanese and Russian soldier. Both are equally brave and per-sistent. It is also true that in strategy, Kuropatkin to be fully a match for Oyama. Therefore, the issue of the great Manchurian campaign next year will d chiefly upon the relative ability of the contest ants to place men, munitions, and supplies at the It will be largely a question of transportation. Can the single-track Siberian railroad, 5,000 miles in length, maintain at the front a larger army than the Japanese with their few hundred miles of transporta tion over three or four independent routes from Ko-rean and Manchurian ports to the front? This is a vital question which will be answered very soon after the break-up of the severe eastern winter

#### TIDAL WATER POWER-MEANS OF OBTAINING A CONSTANT HEAD OF ABOUT THIRTY-EIGHT FEET,

BY W. S. CLEVELAND.

The utilization of tidal water power, owing to its intermittent availability under existing and proposed methods of application, has received but little practical attention, although the immeasurable volume of water subjected to extraordinary tidal action on the Bay of Fundy coasts affords a limitless field for the develop-ment of cheap power, and consequent industrial activity, provided this one serious barrier is removable

The estuaries of the numerous small streams flowing into the bay or its extensive arms are usually bordered by widespreading tracts of marsh lands, drained winding creeks, and protected from tidal inundation by hundreds of miles of dikes. Some of these lands, without the dikes, would be submerged to a consider able depth at every tide, and, in localities where a creek or small river is available for use as a tailrace discharge basin, a sufficient area of these lands could be inclosed with dikes, provided with sluices, designed maintain high water in the reservoir formed thereby, and a dam, also provided with sluices, thrown acrothe creek or river, to exclude the tides therefrom, but with the sluices so adjusted that the tailrace discharge would be drawn off at low tide. The capacity of creeks so used could be enlarged, if necessary, by dredging, and the fresh water flowing into them, if of sufficient volume to be troublesome, could be diverted into other channels, or impounded above a dam, constructed at the upper end of the basin, and also drawn off at low tide, through sluices designed for the purpose. This dam would be inexpensive, as the fresh water would not rise to any considerable height during the few etween the discharge periods, which about four hours in length, or while the tide is out. leaving about eight hours when the low-water sluices would be closed, and a small rise in the water level of the discharge basin incurred. An infinitesimal lo power, however, would be sustained, in basins suitably proportioned to the work. The capacity of the high-water basin would of course depend chiefly upon its area, and a depth of five or six feet would probably be sufficient. Allowing one or two feet for variations in the water levels of the basins, a head of from thirty-five to forty feet would be available, at points on Mines Basin, which, sustained by the limitless volume of ocean water, replenishing the basins every twelve hours, would afford an aggregate power far beyond the utmost capacity of Niagara.

The estuaries of two contiguous rivers, like the Avon and the St. Croix, could be used in a similar m the dam for the high-water basin in the one being provided with sluices, of suitable design and capacity, to supply the water drawn off through a power canal, disharging into the low-water reservoir in e sluices would not need to be more than five or six feet in depth, located in the coping of the dam, and operating during the flooding period-about two hours in length at high tide.

Many of the inlets on Cumberland Basin could be used for the same purpose, the estuary of the Maccan River, and the head of Cumberland Channel, affording excellent opportunity. In this case a tailrace chan nel would have to be excavated across Amherst Point, for an outlet from the low-water basin in the Maccan estuary. Single inlets, with narrow entrances, and low-lying shores, could be used for discharge basins, where sufficient land is obtainable, without excessive excavation for the high-water basins. The cost of ex-cavating such basins, to a depth of five or six feet, would doubtless not be prohibitive.

Lands submerged at high water to a depth of fifteen

or twenty feet, could be surrounded by embankments, and the inclosed area divided equally for the two ba-The discharge basin could then be excavated or dredged to low-water level, and connected th by a tailrace outlet. This work, however, would entail engineering difficulties and considerable cost.

One of the best of opportunities for applying this sthod of using tidal water power is afforded by the harbor of the city of St. John, N. B. Kennebecasis d Courtney bays are large arms of the harbor, but under present conditions, are of little service to ping. The entrance to the former bay is located above the famous Reversible Falls, but subject to the action of the tides at high water, and the latter is studded with dangerous reefs and rocky flats, which render it worthless to shipping, except at high water. The entrance to Kennebecasis Bay is very narrow, and The entrance to Kennebecasis Bay is very narrow, and the embankment making it serviceable as a high-water basin could be cheaply constructed; but the mouth of Courtney Bay is much wider, although not imposing any serious engineering difficulties in the work of converting it into a discharge basin. In applying the thirty-foot head of water thus obtained, the narrow neck of land separating the bays could be crossed by power and tailrace channels, and the turbines located at the most convenient point thereon. Should previou ly suggested improvements, embodying the maintens out, a slight modification of the original plans would facilitate the application of the leading industrial make St. John city one of the leading industrial centers of the continent.

At Moncton, a city of about ten thousand people, located on a sharp bend of the Petitcodiac River, a magnificent harbor, of several square miles in area created at every tide, beginning with a rushing, boiling, wall of water, about six feet in height-the fa Moncton Bore. The water level rises, at flood tide, to a height of about thirty feet; but at low water insignificant streamlet winds through the muddy flats of the river bottom, boiling like a caldron, at inter vals, in its passage over dangerous quicksands, and again spreading onto the outer fringes of sandbars, with thick indurated crusts, over which the pedestrian may stroll with safety. A traffic bridge crosses the river at the upper end of the town, the use of which would facilitate the construction of a dam at this point, where the turbines for a great water power would be located, discharging into the low-water basin above the dam, the outlet channel for which should be excavated through the peninsula of marsh land to a point below the river bend, where a dam, provided with flooding sluices, would complete the work nece sary for the formation of the high-water basin. The cost of the outlet channel, about two miles in length, through marsh land, only a few feet above high-water level, would be moderate, and, with the rest of the equipment, fully justified, considering the unfailing source of the enormous power that could be developed at this point. A gate, permitting the entrance of ship ping at high water, constructed in the lower dam, would remove one of the most serious obstructions to the commerce of the port, which is now restricted to the carriage of small vessels, passing inward with the flood tide, but stranded at the docks when the tide is The completion of this work would substitute a beautiful sheet of water in place of the yawning guif and unsightly mudbanks that now meet the gaze of visitors, who would only have to row to the le to still get a view of the bore

#### WIRELESS BURGLAR ALARM FOR SAFES.

AT THE ENGLISH CORRESPONDENT OF THE SCIENTIFIC AMERICAN bility of the application of wireless telegraphy to bur-glar alarms for safes has been carried out by a wellnown firm of British safe builders. The ordinary type of electric alarm for this purpose poss great disadvantages, which to a very appreciable ex-tent militate against their utility. They either refuse to ring at the critical moment, or they ring suddenly for some inexplicable reason. Furthermore, the expert burglar can always circumvent their usefulness cutting the wires where the system is the complete of an electrical circuit to produce the alarm or where the current flows constantly through the wires, apparatus, and contacts, and the alarm rings when the cir cult is disturbed by joining the wires together and completing the circuit outside the safe. There is another protective system generally adopted in this country, arranged with constant current when on guard which will give the alarm if the wires be joined so as to produce a short circuit, and thus cut the object which is protected out of circuit, so that the alarm bell will commence ringing, no matter what sort of at-tempt may be made to tamper with the wires. This latter system, however, is essentially dependent upon the introduction of a fine resistance coll inside the safe or object to be protected. When the wires are ered with, the effect is to cut out this resistance coil from circuit, and by so doing a galvanometer needle is thrown over from its normal position to make contact for the relay which works the bell.

With an efficient wireless system, however, tampering so as to destroy the efficiency of the apparatus would be impossible. In this arrangement the safe is equipped with a small but efficient transmitter. When the safe is opened waves are radiated, which coming into contact with the usual coherer at some distant central point, ring a bell and so announce the fact that the door has been opened. To effect this, the battery power and induction cell which make the electrical waves are both contained inside the safe, while the steel of which the safe itself is made acts in

a similar way with a long wire supported on a high pole, as the antenne in wireless telegraphy.

The application of the principle to this particular purpose is still in its infancy, but the experiments made up to the present conclusively demonstrate the possibility of its general utilization, provided that satisfactory instruments are used, and careful tests made every now and then to see that all the various parts of its are in process.

of it are in proper working order.

The one great drawback to the general employment of this system, however, is the expensive nature of the necessary apparatus, the cost of which varies from \$1,000 to \$1,500. For the purpose of these tests, however, instruments of a much cheaper description have been employed, so as to roughly enable the experimenters to test the possibility of their application in a general way.

The success of the trial, however, opens every possi-bility of its successful and widespread utilization, and no doubt a cheaper though equally efficient form of ap-paratus will be evolved, so as to render the system comnercially practicable. Incidentally, it may also be sentioned that the whole of the safe is so charged with electricity that it gives a slight disconcerting shock to anyone who touches it.

#### SCIENCE WOTER.


In the Comptes Rendus of the Paris Academy, Mr. Lowell gives the result of a series of spectrographic determinations of the rotation of Venus and Mars. For Venus, the speed of motion of a point on the For vonus, the speed of motion of a point on the equator was found to be practically sil, the probable error of the observation only amounting to 0.008 kilometer per second, the result thus supporting the idea that Venus rotates in the same period as her revolution. For Mars the speed was found as 0.228, the computed value being 0.241. The probable error in the case of Mars was 0.036. The satisfactory result obtained for Mars leads support to that for the larger and brighter planes. and brighter planet.

The recent discoveries of wonderful new types of ex tinct animals in the tertiary deposits of the Fayum Desert of Northeastern Africa, and their bearing on the origin of the modern African fauna, are discussed by Dr. C. W. Andrews in the Quarterly Review. The new evidence shows unmistakably that the Proboscidea (elephants and mastodons) and the Hyracoidea (the ey" of Scripture and its relatives) were devel in Africa itself; but it does not appear to invalidate the long accepted theory that the bulk of the modern African fauna is of northern origin. It might, however, have been added that, in view of the discovery of cer-tain antelope and other remains in the later tertiaries of Africa, the migration may liave been somewhat ear-lier than commonly believed. Probably, indeed, there have been several migrations of African types to the north and of European and Asiatic types into Africa. In this connection it may be mentioned that Dr. C. W. Andrews, the chief describer of the extinct Fayum fauna, has brought to notice in the November numb of the Geological Magazine a remarkably fine shell of the giant land tortoise, Testudo ammon, of the Upper Eccene beds of the district in question. This appears beds of the district in question. to be the earliest of the big land tortoises, and have been the ancestral type from which those of agascar, Mauritius, and the Mascarene Islands, together with the extinct Indian species, were deriv

The past year has been noteworthy for the amount of literature devoted to the members of the horse tribe, or Equida, writes R. Lydekker in Knowledge. the latest contributions to the subject is an article by Mr. R. T. Pocock, the superintendent of the London Zoological Gardens, on South African quaggas, pub-lished in the November number of the Annals and Magazine of Natural History. According to the author, we have to deplore the extermination not of one, but of several distinct forms of these animals; the quagess of the older writers, of which two races are recognised, being distinct from those exhibited forty years ago in the Regent's Park and other menageries. Without for a moment saying that the author may not be right in his view, it certainly does seem strange that the whole of the quagga-skins which have come down to us should differ from the animals described by the older zoolo-gists. The Asiatic and African wild asses form the subject of a paper by the above writer published in a recent issue of Novitates Zoologics, the organ of Mr. a recent issue of Novitates Zoologics, the organ of Mr. Walter Rothschild's zoological museum at Tring; an apparently new race of the "onager" from Central Asia, now living in the Duke of Bedford's park at Woburn, being described and figured. The description of one of the two races of the African wild ass is based on specimens killed in the Eastern Sudga by Mr. N. C. Rothschild, one of which is now mounted in the British (Natural History) Museum, while there is a second in the Edinburgh Museum, and a third in Mr. Rothschild's own collection. As the construction of the Suskin-Berber railway is only too likely to lead to the extermination of this race, these specimens are very precious.

#### PREUMATIC PUMP.

We illustrate in the accompanying engraving a rather ingenious type of pump, which is operated by compressed air. The pump consists of a closed chamber, which may be placed in a well below the level of the water. An upwardly-opening valve is provided in the bottom of the chamber, and projecting through the



NOVEL PUMP OPERATED BY COMPRESSED AIR.

top is a standpipe which extends nearly to the bottom of the chamber. The standpipe carries a sleeve to which is secured a float. Above and below this float are two smaller supplementary floats, which slide freely on the sleeve. The main float is connected to the standpipe by two pairs of toggle levers, which pass through slots in the sleeve. One pair of toggle levers has lever connection with the upper supplementary float, and the other pair with the lower supplementary In addition to the standpine two other pipes float. enter the top of the casing, the one at the right being the compress ed-air pipe, and the other a discharge pipe which-permits escape of the air while the chamb filling. These pipes are provided with valves, which are operated by the sleeve on the standpipe, the ar rangement being such that when the sleeve is up, the ed-air pipe will be open and the discharge pipe sed, and when the sleeve is down, the discharge pipe will be open while the compressed-air pipe will In operation, when the air supply is cut off, ater will flow up into the chamber through the valve in the bottom. The main float will be kept from rising by the weight of the upper supplementar which locks the upper pair of toggle levers. mentary When. however, the water rises sufficiently to raise the upper float, the toggle lock will be broken, releasing the main fleat, which will rapidly and forcibly rise, carrying the sleeve up, and thereby opening the valve of the com-pressed-air pipe and closing that of the discharge pipe. The inflowing air will now force the water out of the

ber and the standpipe. In meantime the main float is kept dropping by the buoyancy of which holds the lower toggle levers in locked po-When however, the level water falls of the below the latter drop. will tripping the toggie, and permitting the main float to tall also. This reverses the posi-tion of the valves air and discharge pipes, and per-mits the chamber to fill up again. The operation is en repeated. then cipal advants this pump are

is a small supply of water, it will pump all of it out as fast as it runs in; several wells can be run from one power by connecting air-supply pipes thereto, and the power need not be at the well, but wherever most convenient. The inventor of this pump is Mr. E. Hastain, at Tishomingo, Indian Territory.

#### ELECTRICAL APPARATUS FOR FELLING TREES.

A patent has recently been granted to Mr. T. O. Wil-on, of Little Rock, Ark., on an electrical apparatus for felling trees and sawing logs. In place of a saw blade, this apparatus uses a platinum wire which is heated to a high temperature by an electric current. and this burns its way through the wood. The apparatus comprises a frame similar to that of a buck saw. s the lower end of which the resistance stretched. The tension of the wire may be adjusted by a bar which extends between the side arms of the frame, and is clamped at one side by a thumb screw passes through a slot in the bar. The upper end of the frame is provided with a coil spring adapted to draw the side arms together, to take up the slack in the resistance wire as it expands when heated by current. Since ashes are apt to collect in the kerf and retard the burning of the wood, the inventor has provided a mechanism for reciprocating the saw frame Furthermore, the resistance wire may also be wound with a short length of platinum wire, and the coils of the latter will act as drag teeth to remove the fine s and clear out the charred fragments. The mechanism for reciprocating the saw frame, which is clearly depicted in the engraving, may be driven by an electric motor. The apparatus offers the advantage that it may be operated at long distance from its source of power, thus giving it a wide radius of action. The inventor has designed the apparatus particularly for the use of lumbermen in felling trees. The electric

saw permits of cutting off the trees very close to the ground, and at a much smaller expenditure of labor than with the usual hand-operated saw.

#### DESTRUCTIVE HEAD-ON COLLISION.

It is not often that one sees the destructive effect of a head-on collision between freight trains so graphically portrayed as it is in the accompanying illustration. The wreck occurred at Colo, Story County, Iowa, on the Chicago and Northwestern Railway, before daylight on a frosty and very foggy morning. The station lay at the foot of

a heavy grade, and, at the time of the accident, a long freight train had just pulled in from the west, and was standing on the main track, the engine being near the depot building. A double-header train coming in from the east was intending to take the side track in order to allow the two trains to pass. For some reason or other, the brakes failed to work, and, the train failing to take the switch, the collision occurred. The engine at the head of the standing train remained on the track, only the forward trucks being displaced, and after the collision it was able to be removed under its own steam when the wreck had been cleared away. Of the two engines shown one above the other in our engraving, the one above was the leading engine of the pair at the time of the collision. The second engine, driven by the momentum of the train behind it, wedged its way under the tender ahead and was

crushed under the forward engine, which it lifted up on end. The illustration gives forcible evidence of the great resisting power of a modern locomotive under the enormous strains and impact to which it is subjected in a wreck of this kind. We are indebted for our information and photograph to Mr. G. A. Fox, of Zearing, Iowa.


#### Bovine and Human Bacilli Pound to Be Distinct.

The Imperial Commission of consumption experts appointed by the German government some time ago to investigate the relations between bovine and human tuberculosis bacilli held an important meeting at the Imperial Health Department in Berlin, November 25. Dr. Weber, one of the most eminent members of the commission, reported on the work which that body has already done. The result of the investigations so far is to show that bovine and human bacilli are absolutely distinct biologically from one another. The one never develops or changes into the other.

never develops or changes into the other.

So far the commission has examined the bodies of fifty-six persons who died from tuberculosis. In fifty cases only human bacilli could be discovered. In six cases, however, the bovine bacillus was found. Three of these cases were young children, and the surmise is permissible that they received the bacillus from the milk of a diseased cow. Two other cases which Dr. Weber regards as most important are those where the corpses showed bovine bacilli in the glands and human bacilli in all other portions of the body. These were distinct cases of double infection. Another most important case is one of lung tuberculosis, where in the diseased lung both bovine and human bacilli were associated.

The conclusion of the commission, in general terms, is that tuberculosis in human beings is caused by the




SAWING LUMBER WITH AN ELECTRICALLY-HEATED WIRE.

human bacillus, but that it behooves us to be careful and to use all prescribed measures to secure ourselves against infection from bovine bacillus.

An interesting commercial development, to test the possibilities of steam lorries for collecting and distributing heavy traffic in remote agricultural districts in connection with railroads, has been made in the district of York, by the North-Eastern Railroad in conjunction with the Agricultural Organization Society on behalf of the Brandsby Dairy and Trading Association. The railroad authorities have established a service of motorcars between their station at Tollerton, ten miles north of York, and Brandsby, eleven miles from Tollerton. The cars will run in each direction daily. Each steam lorry has a carrying capacity of five tons, of freight, and is capable of hauling at least one trailer carrying

two and a half tons. On the outward journey the lorry carries limestone, provisions, etc., and distrib-utes the same around the various farms in the district. Simul taneously, cars collect the any produce that is to be forwarded by rail. By this sys tem not only transport facilitated, but the farmers in districts distant from the railroad are brought into contact closer with the markets, and the service will prove a considerable saving to them in the cost of haulage If successful, similar services will be inaugurated elsewhere.

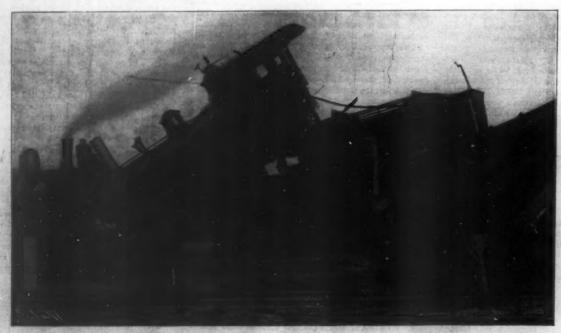

A DESTRUCTIVE HEAD-ON COLLISION IN WHICH THREE LOCOMOTIVES FIGURED.

## A NEW HOME FOR THE PEARY METRORITE.

A NEW HORE FOR THE PARKY REPORTS.

Ahnighito ("The Tent"), the giant meteorite discovered by Lieut. R. E. Peary in Greenland in 1894, has been removed from its rather secluded position on Cob Dock, in the Brooklyn navy yard, and more strikingly exhibited on a mounted pedestal under the entrance arch of the Museum of Natural History, the two lesser ones (the "Woman" and "Dog"), com

panion meteorites found at the same time, having been previously installed in the in-According to the legendary records of the present natives these three masses were originally an Innuit woman, her dog and tent, who were hurled down from the sky by the evil spirit. On account of the extreme high latitude in which the meteorite was found, namely, Melville Bay, thirty-five miles east of Cape York, North Greencoupled with its great size, uncontrovertible celestial origin, and the human associations surrounding the same, Ahnighito can be fittingly classed as the world's largest and most famous meteorite which has so far fallen on the earth's surface and been weighed. Its nearest rival is Bacubi-rito, of the State of Sinaloa, Mexico, whose weight has not yet been determined, but which, however, is conjectured to be far below the tonnage of Ahnighito. The new position of the noted meteorite displays its size and shape to marked advantage, the size rendering it conveniently accessible to the general public and scientists for exami-nation. While it required many weeks of patient and laborious work for Lieut, Peary and his band of Eskimo helpers, with limited tools, to dislodge the mighty mass from its position of centuries in the Polar world and to safely get it into the hold of the "Hope" for its long voyage to civilization, the second moving of Ahnighito, measuring eleven and a half feet in length, seven feet six inches wide, six feet thick, and tipping the scales at thirty-seven and one half was, with the aid of up-to-date appliances

speedily conveyed and set down in its new home in a day's time. At the foot of West 50th Street, North wrecking barge, with a huge brought the meteorite from the navy yard and swung it upon the contractor's wagon, drawn by twentyeight horses. The transportation charges on this precious mass amounted to over \$500. The big meteorite is of especial scientific interest insomuch as its genuineness has been passed upon by the most celebrated experts of Europe. Fragments were sent to Profs. Fletcher, of the British Museum, Weinschenck, of Munich, Brezina, of Vienna, also Prof. Salisbury, of the University of Chicago. These high authorities pronounce the pieces examined to be of extra-terrestrial origin and belonging absolutely without doubt to a meteorite, as the topography of the surfaces examined in detail possess all the distinctive characteristics which mark the heavenly bodies and are not found in any other stones or metallic mas es on the earth's surface. The analysis by Prof. Whitfield of the American Museum showed that it contained 91 per cent

of iron and 7 cent nickel. The color brown or One color is a dark side is wedgeshaped, the opposite tabular discov When ered it was sunk in the earth with the wedge side down. According to Prof. Salisbury member of the Peary expedition, the meteorite evidently fell on glacier ice, when ice covered the whole region where it lay On the melt ing of the ice meteorite was let down upon the surface in the po sition where it was found.

half buried.

It is thought that a con siderable portion of the meteo It is thought that a considerable portion of the meteo-rite has been removed by chipping off the fragments by successive generations of primitive natives in fash-ioning their crude implements for hunting land and sea-animals, their only chance for subsistence. Thus the big meteorite has been of great economical value to an entire aboriginal tribe isolated for centuries from civilization, the most northerly and smallest upon earth, whose habitat is entirely barren of metal.



REMOVING THE PEARY METEORITE TO THE AMERICAN MUSEUM OF

For hundreds of years prior to the advent of white communication the natives obtained their scanty iron supply for knives, hatchets, harpoons and arrow-heads from their iron mountains. Piles of blue trap rocks used by them in pounding off fragments of their god for making their weapons were found near by. Several of these interesting relics, so closely associated with the big meteorite, were brought back by Lieut. Peary among the Eskimo collection of the Museum.

#### THE AERIAL BRIDGE AT DULUTH.

The unusual form of bridge shown in our illustra-tion will possess decided novelty to American eyes, for it is the first of its kind to be built in this country. erected in accordance with an agree petual free ferry service made by the city of Duluth sideration of a grant of right of way for the United States ship canal at that port. For many years, two old-fashioned flat-boats plied half-hourly between the two landing points; but as the canal widened, this primitive mode became extremely incon-


venient, not to say dangerous, and tugs were bired to take their place. With each succeeding year the expense increased, and the perpetual ferry began to loom up before the city fathers as quite a leading question. Numerous alternative plans were discussed, and for one reason or another abandoned. The estimated cost of a tunnel—about one million and a half dollars—rendered that form of communication out of the question, and the War Department refused to allow a drawbridge of any kind. One of the mayors of the city, however, had seen and been much impressed with the aerial bridge which was opened a few years ago at Rouen, France; and its applicability to the conditions at Duluth was so apparent, that this type was readily adopted. The present bridge was planned on the principles of the Rouen structure, and it will no doubt prove to be a satisfactory solution of the problem. Although the structure will be the first of its kind in America, it is not by any means novel in the ongineering world, as there are in Europe to day three heiders of the same novel in the engineering world, as there are in Europe to-day three bridges of the same general type: The one mentioned at Rouse, France, over the Seine; another at Pt. Ega-

lite. Spain; and the third at Bigerta, Tunis
The bridge at Duluth, as will be seen
from our engravings, is a decidedly imposing structure. It consists of two piers of ing structure. It consists of two piers or towers on shore, supporting a deep truss which spans the open waterway. There is nothing special in the details of this work, the piers being of the standard type used in steel railway viaducts, the truss being of the usual American design with long panels and single intersections. The poets are vertical on the side facing the channel, the other two posts on the land side being battered to give the necessary stability. In the crection of the structure the piers were first built to their full height, and then the trusses were crected by the overhang meth-

built to their full height, and then the trusses were erected by the overhang method, a temporary timber bent being used to support the first panel of the truss, and the rest of the overhang being erected from traveling derricks mounted upon the top chords. At the time our photograph was taken the last section of the top chord was being lifted into place by the derricks. From the water-line to the bottom of the trusses is 135 feet, and as the truss is 50 feet deep, the highest point is 135 feet above the water. The clear span between towers is 331 feet 6 inches. Special attention was given to wind pressure, the bridge being built to withstand a wind velocity of seventy miles per hour blowing transversely to the axis of the bridge. The traveling car will be suspended from the lower chords by stiff cables, and its floor will be 12 feet above the water level. tance between landing points will be made in one and one-half minutes, and the schedule for trips will be arranged by the War Department soon after the com-pletion of the bridge. The car measures 20 feet by 30 feet, and it has a capacity of 65 tons. The total cost of the structure will be about \$110,000.

The French Admiralty recently carried out an interesting experiment to ascertain whether the explo

sion of a tor-pedo in the vicinity of ercises any inalongaide The submarine anchored Petet, Cape do, containing kilo. gun cotton. distance of 50 from the submawhich, posed to posed to full force of the exploding ond weapon. Not the slight ond mt damage

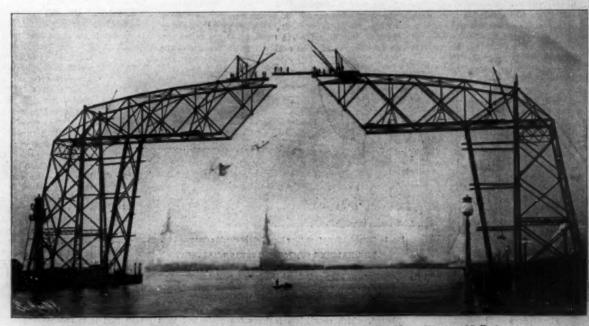

Clear Span, 3811/2 Feet. Depth of Truss, 50 Feet. Clear Height Above Water, 185 Feet. Travel will be by means of a suspended our hung from the bottom cheeds of the truns,

THE NEW ARRIAL BRIDGE ACROSS THE SHIP CANAL AT DULUTH.

#### Statistics of the American Iron Trade.

One of the most important and interesting of the statistical papers published annually by the United States Geological Survey is a review of the American fron trade. The report for 1903, like those of many preceding years, was prepared by Mr. James M. Swank, general manager of the American Iron and Steel As-sociation, and contains a great variety of data regard-ing the production and shipments of iron ore; the

imports and exports of iron and steel; the average monthly and yearly prices of iron and steel and articles manufactured from them; the production and consumption of pig iron; the production of spiegeleisen and ferromanganese; the production of all kinds of steel, as well as the numerous articles, such as castings, rails, wire rods, wire nails, and sheets, which are made from steel; the Canadian iron trade; and the world's production of iron ore and coal, of pig iron and steel.

The prosperity which characterized the iron trade of the United States from the beginning of 1899 to 1902 and throughout the early part of 1903 was suddenly checked about the middle of 1908 by a sharp reaction in the stock market, which caused a decline in the demand for iron and steel and a consequent decline in prices. Production during the first half of the year was on a large scale, and prices were satisfactory, but in the last half of the year both production and prices declined rapidly. Soon after the beginning of the year 1904, however, there was a revival of activity in production, but, prices did not raily. In October, however, the prices of pig iron advanced. During September

October there was a distinct revival of confidence and hopefulness in the iron trade, and by the time Mr. Swank's report was written, in the latter part of October, there were few signs of the reaction which belittle more than a year before.

Mr. Swank's tables of statistics show that the world's uction of iron ore during 1903 amounted to 100, 900,000 tons, of which the United States claims 35,019. The world's production of coal and lignite amounted to 870,498,000 tons, of which 319,068,229 tons belonged to the United States. The world's production of pig iron in 1903 amounted to 46,420,000 tons, to which the United States contributed 18,009,252 tons The world's production of steel during the same year amounted to 35,510,000 tons, of which the United States produced 14,534,978. It is thus seen that in the proction of iron ore, coal, pig iron and steel-all great factors in the world's material progress-our country is the leader. We produce 34.71 per cent of the world's from ore, 36.65 per cent of its coal, 38.80 per cent of its pig iron, and 40.93 per cent of its steel.

The Current Supplement.

The current Supplement, No. 1512, opens with a spiendidly illustrated article by the English corresp dent of the Scientific American, on the battleship "Dominion," which forms one of the "King Edward VII." class. Mr. Joseph Hollos writes on simultaneous telegraphy and telephony. An excellent discussion of the limitation and the use of storage batteries is presented by H. M. Hobart. The last installment of the exhaustive series on "Current Wheels: Their Use for Lifting Water for Irrigation" is published. Taken as a whole this series of articles may be conthe construction and operation of current wheels that has so far appeared. Commander

Peary's paper on the North Polar explora-

tions is continued. "On the Modern Reflecting Telescope and Making and Testing of Optical Mirrors" is the title of a series of articles from the pen of Prof. G. W. Ritchey, the first of which appears in the current Supplement. The papers will describe the methods employed by Prof. Ritchey in the optical laboratory of the Yerkes Observatory in making and testing spherical, plane, paraboloidal, and hyper-boloidal mirrors. The subject is very thoroughly discussed. The treatise will be followed at an early date by an excellent pa-per of Prof. Draper's on the making of a 15-inch telescope. There has recently been 15-inch telescope. There has recently been installed in the McKeesport plant a new 40-inch universal alabbing mill, which is remarkable for its size and some novel fea-


tures introduced into its construction. The worthfly treated in a well illustrated and fully descriptive article. The usual Trade Notes and Recipes, Engineering Notes, Science Notes and Selected For

Catinite is the name given to an indurated clay rock case used by the Dakota Indians for pipe material. It is also called Indian pipe-stone.

#### THE HASCHNE COMPOUND STORAGE BATTERY.

The illustrations shown herewith give a good idea of the construction and method of assembling the plates of a compound or multiple-series storage battery, which has been patented and put into practical use by Mr. J. E. Haschke, of Chicago, Ill.


The idea the inventor had in mind in designing this battery was to economize in weight and space as much mible, and at the same time construct a battery



mpound Battery A.

8. Division Plate

of great efficiency and durability which would be suitable for all kinds of automobile work. He had already developed a plate and form of separator which practical tests in electric automobiles had shown to work well, so that his present invention consists in a method mbling these, or, indeed, the plates arators of any standard type of storage cell.



The Haschke plate, as constructed and used for the past eight years, consists simply of a thin sheet of pure lead highly perforated with holes about one-twelfth of an inch in diameter, these holes being filled with the usual paste of red lead or litharge for the pos or negative plates respectively. Such plates are highly flexible, and, although the tendency of the active material to cause them to buckle is slight because of the




Fig. 3.—Completed Crate Containing Right Cells of Flaschke Compound Battery.

#### THE HASCHKE COMPOUND STORAGE BATTERY.

nallness of the pellets of the latter, still any warping that does occur will not harm them on account of their flexibility. The separator used by Mr. Haschke con sists of a specially-treated envelope of thin card-board, which completely incloses the plate and thus tends to keep the active material from falling out. After being treated by exposure to certain gases engendered by electrolysis, this thin cardboard, when placed in the sulphuric acid solution, beco

tough as leather while remaining porous. It has to be renewed after three years' use, owing to its ditegrating on the top edges, where the air gets at it. If kept completely submerged, it will last longer.

The new compound battery is made up of several individual cells consisting of U-shaped hard rubber Rubber frames clamped between thin lead plates. gaskets are used in order to make acid-tight joints. Any suitable number of cells may be arranged in this

way, and as many plates may be placed in each cell as it is made wide enough to re-ceive. Mr. Haschke, on account of the extreme thinness of his plates and the compa manner in which they are assembled (see Fig. 1, No. 2), gets as many as six plates in a cell  $\frac{\pi}{4}$  inch wide; and, as these plates can be made as long and as high as the space in the battery compartment will permit, a very large active surface can be obtained. The division plates forming the side walls of the cells serve as current conductors and as sun ports for the end plates of adjoining cells, which are soldered to the division plate across the top. In Fig. 1, No. 3, D P is a division plate with a negative plate soldered to one side and a positive plate to the other. As all the positive plates of any one cell are connected together, and all the negative plates are likewise connected, it follows that since all the positive plates of a cell are connected to the positive plate on one side of a division plate, and all the negative plates of the next cell are connected to the negative on the other side, the positives of one cell are all connected to the negatives of the one following through the division plate.

This makes unnecessary the connecting lugs tween cells which are ordinarily employed, and thus reduces the resistance of the circuit considerably. In practice, however, the inventor lead-burns the lugs the positives of one cell to those of the negatives of the next, arching them over the division plate and also at taching them to it, as shown in Fig. 3. The division plates are brought up an inch or two above the plates proper, and they are curved so as to avoid splashing and to afford sufficient surface to prevent leakage of current. The diagram, Fig. 2, shows the arrangement of the plates proper and the division plates. The division plates are here shown clamped between the Ud hard rubber pieces by means of rubber gaskets and bolts passing through steel end plates. The appearance of the battery when finished is shown in Fig. 1. No. 1. It is afterward placed in a crate and covered with plates of glass. Such a crate, containing eight cells, is shown in Fig. 3. An 80-volt, 200-ampere-hour battery weighs, according to the inventor, about 850 pounds, which is extremely light for a battery of this capacity, while by doing away with the usual hard rubber jars the chance of leakage from breakage or defect is reduced. The compound battery can be filled with electrolyte in a few moments, and all the cells can readily be inspected through the glass cov-ers, or the electrolyte can be tested after the cover glasses have been removed.

The "hole interrupter" invented by Prof. Simeon was designed with a view to utilize the Joule heat for interrupting an electric current. As, however, Mr. Johnson, in the course of his experiments recently presented to the French Academy of Sciences, has convinced himself, the working of this instrument, so far from being due to the Joule heat, is to be ascribed to causes quite foreign to any heating effect. Now Mr. Johnson

has tried to construct an interrupter that would really be actuated by A reversed funnel, the pipe of which was 7 millimeters in diameter and 10 millimeters in length, was glued to the lower part of a cylinder 75 millimeters in diameter. The vessel thus formed was im-mersed in a tumbler filled with a mixture of alum solution and sulphuric acid. Two aluminium plates were inserted as elec trodes, one into the cylinder and the other into the outer tumbler, and connected to the terminal of a 110-volt battery. On completing the current, a vapor was formed in the funnel pipe, escaping into the inner cylinder, where it was rap idly condensed. The circuit is opened when the bubble forms in the pipe closed on its escaping into the cylinder. The current then forms another bubble

which in turn rises into the cylinder, and so on. This interrupter possesses the drawback of working rather slowly (its frequency being smaller than the Foucault interrupter); on the other hand, it affords the advantage that it is independent of the dimensions of the metallic circuit, even in case there are no inductive coils or solenoids, whereas the Wehnelt and Simeon interrupters require a self-induction that is susceptible of variation only within rather narrow limits.

33

#### Correspondence.

#### Indian Summer.

To the Editor of the SCIENTIFIC AMERICAN:

I was much interested in a late article on the cause of the "Indian Summer." Also in a note from a Southern correspondent.

I spent thirty-five years in western New York and the past six years in South Carolina on the Santee The fall here is quite the opposite of the "Indian Summer" of the North. Day after day the air has that crystal clearness that is sometimes seen in the North the morning following a thunder storm. I have noticed this and enjoyed it every fail of my stay here. I write this, as it seems to me to confirm the theory of the "Indian Summer" as noted by your correspondent.

The blue haze spoken of in your note from the South is the drawback to sightseeing in the North Carolina mountains, at all times of the year, as I have found from experience, and not peculiar to the fail.

E. J. Hurchinson.

Ferguson, Berkeley Co., S. C., December 13, 1904.

#### Mosquito Extermination.

To the Editor of the SCIENTIFIC AMERICAN:

In a recent issue of your valuable paper there was a notice of a national meeting to be held in New York and Brooklyn, in regard to the extermination of mosquitoes. I would suggest the following plan for the distribution of crude oil into the haunts of these pests: Papier-maché bombs are loaded with crude oil with a small time fuse and small-quan-tity of explosive in the interior of the shell, which bursts them at any predetermined distance, scattering the oil over a large surface and in inaccessible places where a force pump or spray would not cover. The shells can be fired from mortars similar to those use in pyrotechnic displays. This, it seems to me, would be a very simple and inexpensive way of covering a large territory F. A. Dobson.

New York, December 10, 1904.

#### Botlers in the Upited States Navy.

To the Editor of the SCIENTIFIC AMERICAN:

I trust I am early enough to have a correction made in this week's issue of a statement contained in your very interesting editorial of the 3d instant, descriptive of the trial of the "Pennsylvania."

Wholly in the interests of fair play I call your attention to the erroneous impression conveyed by that part of your reference to changes in the machinery of the "Pennsylvania," in which you state: "The battery of thirty Babcock & Wilcox boilers was replaced by a battery of thirty-two modified Niclausse boilers."

While naval officers are about the most conservative critics in the world, it so happens that the innuendo inferentially cast on the Babcock & Wilcox boiler by the above note touches their pride in the wonderful efficiency and durability of that particular type. backed by years of experience with it, and by unimpeachable data indicating an economy unexcelled by any other type, makes the reflection (which I am sure was inadvertent) particularly unfortunate, especially as the other type, however excellent, has yet, its repu-

as the other type, however excellent, has yet its repu-tation to make by long service in our navy.

It is also true that the results of the trial of the "West Virginia," while less gratifying than those of the "Pennsylvania," were in no degree attributable to

the difference in the boiler plants.

I have, therefore, simply to request that you will so modify your article as to state the fact that Babcock & Wilcox boilers were never designed by the department for the "Pennsylvania." The department simply specified water-tube boilers of straight tube type, and the Cramps, simply in this case, decided upon the Very truly yours, Niclausse.

A. B. WILLETS

Commander, U. S. Navy.

Philadelphia, Pa., December 7, 1904.
[We take much pleasure in inserting Commander Willets' letter, for we certainly had no intention of casting reflection upon any particular type of boiler. The use by the builders of a certain make of boiler, in preference to another that is commonly installed in our battleships and cruisers, was mentioned merely as being one among several points of difference in the motive power of the two sister ships.-Ep.1

#### Firing Tests of the Brown Wire Gun.

The 6-inch Brown wire gun which was illustrated and described in our issue of May 7, 1904, is now at and described in our issue of May 7, 1994, is now at Sandy Hook, undergoing its acceptance trials by the Army Board. Up to the present 7 rounds out of the total of 250 have been fired, with powder charges varying from 32 to 64 pounds, and the results are decidedly promising. The first three rounds of 32, 48 and 58 pounds of powder were what might be called warming-up rounds, and with the last-named charge a

city of 2,879 feet per se cond was obtained at 150 receity of 2,879 feet per second was obtained at 180 feet from the mussle, with a powder pressure of 28,500 pounds to the square inch. In the sixth round, with a charge of 64 pounds of powder, the velocity was 3,174 feet per second, at 150 feet from the muszle, with a chamber pressure of 37,060 pounds to the square inch, and a recoil of only 18% inches. The gun gives every promise of reaching its estimated velocity 3,500 feet per second with 42,000 pounds pressure the powder chamber.

# New Expeditions for the Observation of the Total Solar Eclipse of August 30, 1905. BY MARY PROCESS.

The great astronomical event of the coming y The great astronomical event of the coming year (1905) will doubtless be the total solar eclipse of the sun, August 30, already referred to in the Scientific American for August 20, 1904. Plans are now being formed with regard to eclipse expeditions, the choice of observing stations being specially favorable. Several well-equipped expeditions will probably be sent from this country and Europe.

Mr. William H. Creeker of California has several.

Mr. William H. Crocker, of California, has generously offered to defray the expenses of expeditions to be sent from the Lick Observatory to Labrador, Spain, and Egypt, and the provisional programme for the three ns is, in the main, as follows:

In Labrador, a photographic search will be made for intramercurial planets, in a region of the sky 8½ deg. wide, extending in the direction of the solar equator from 4 deg. below the sun to 15 deg. above it. It has been thought likely that there may be on more planets between the orbit of Mercury and the sun, and during a total eclipse they would become visible, if ever. On the whole, however, the observations so far made negative the existence of any b of considerable size in this region, though in 1878 Prof. Watson and Mr. Swift, it was thought, had discovered one, if not two, such planets,

In an article contributed by Prof. W. W. Campbell, of the Lick Observatory, to the Popular Science Monthly, for June, 1904, he writes: "The eclipse of August 30, 1905, will occur when the earth is seven degrees from the plane of the solar equator. It will there be advisable to search over a region of considerably greater width than was the case in 1901. Inasmuch as increased area means increased instrumental equipment, expense, and difficulty, a corresponding sh ing of strip to be observed would perhaps be justified. It is to be hoped that observing parties well equipped for the intramercurial search will be located in Labra-Spain, Tunis, and Egypt. If clear weather pre vails at any of the four stations, very valuable results may be secured. Should a new planet be observed at three such stations, the enormous interest attaching to its discovery would be heightened by the fact that its approximate orbit could be determined at on If no planets are revealed on first-class plates, the negative result would be scarcely less valuable, though certainly less interesting, than positive results; and the intramercurial question would cease to be a pressing eclipse problem."

Owing to the generosity of Mr. Crocker, a photo graphic search for intramercurial planets will be made not only in Labrador, but in Spain and Egypt as well. In Spain the photographic intramercurial search will cover a region of 9% deg. wide, extending in the direction of the solar equator from 14 deg. below to 14 deg. above the sun. In Egypt the photographic intramercurial search will cover a region of 8% deg., extending in the direction of the solar equator from 4

deg. below to 15 deg. above the sun.

Photographs of the corona by means of a cam five inches aperture and forty feet focus, of the form first used by Prof. Schaeberle at the eclipse of 1893, will be made at Labrador, Spain, and Egypt. large-scale coronal photographs made by Schaebe The that eclipse opened a promising way for determining an explanation of the changing form of the corona, and whether the coronal streamers are moving in or out, or both, or neither, a question that has not yet been satisfactorily answered. Photographs of the corona should be secured for this purpose at widely separated stations; and the circumstances of the wide ly-separated stations in Labrador, Spain, Tunis, Egypt seem admirably adapted for solving this most important problem at the coming eclipse.

In Spain, a study will be made of the polarized light in the corona. These observations with the polariscope are for the purpose of determining the relation between the reflected and intrinsic light, and perhaps the size of the reflecting particles which are distributed through the corona

The expedition in Spain will also be provided with spectrographs with moving plate-holders, which will be used to obtain a continuous record of changes in the spectrum of the sun's edge at the time of second and third contacts; and other spectrographs for de termining the wave-length of the green coronal bright line, and, if possible, the wave-lengths of the bright and dark lines in the isolated spectrum of the sun's

edge, as nearly as possible at the time when the dark lines give way to the bright ones, and vice verse; and of a spectrograph for recording the general spectrum of the corona

This is merely an outline of the programmes for the three eclipse expeditions to be sent from the Lick Observatory, California, to Labrador, Spain, and Egypt, respectively. The details of the programmes have not yet been fully worked out, but will be announced

The Yerkes Observatory will not send any exp tion to observe the total eclipse next August, but the Naval Observatory, Washington, D. C., will probably send three expeditions, one of which may

Prof. E. C. Pickering, of the Harvard College Observatory, Cambridge, Mass., states that there will be no official expedition from the observatory. However, Mr. L. W. Ripley, of Hartford, Conn., intends to conduct a party under the auspices of a local as

duct a party under the auspices or a socientific society.

An expedition composed largely of amateurs will go to Burgos, Spain, which is probably one of the most desirable stations along the route of anticipated darkness. A programme is being arranged for covering the minor details of an eclipse, such as observations of the diminishing sunlight; the peculiar shadows cast by the foliage on the ground when the sun is nearly eclipsed; the strange wavering lines or shadowbands, as they are called, which make their appearance a few moments before totality; the swift onrush ance a few moments before totality; the swift onrush of shadow; and finally the glorious but indescribable

torona. Thus, while the astronomer is absorbed in special details which require his whole and undivided attention, the amateur enjoys the opportunity of watching the unfolding glories of the corona from the standpoint of a poet or artist. Words fail to convey the impressiveness of the scene (which has been witnessed by the writer on two occasions), and from remotest times it has been described with enthusiasm, as being one of the most beautiful of natural phenomena.

Successful Veyage of the Turbine Steamer
"Leongana."

The marine steam turbine has once again demonstrated its possibilities and suitability for the same class of work as that which has hitherto been fulfilled
the ordinary reciprocating engines. Details have by the ordinary reciprocating engines. Details have recently reached London of the passage of the turbine-propelled steamer "Loongana" from Glasgow to Australia. The "Loongana" is a vessel of 2,440 tons, driven by three Parsons turbines. The journey was covered in 30½ days. The vessel experienced some of the in 30½ days. The vessel experienced some of the roughest possible weather during the voyage, but even under these most adverse conditions it was found that with four boilers at work, a speed of 18 knots per hour could be easily maintained. Some interesting tests were carried out during the voyage to ascertain the relative economies of the turbine and the ordinary. relative economies of the turbine and the ordinaryreciprocating engines, and conclusive data were obtained showing at what speeds the turbine is the less
expensive. These experiments proved that for vessels
where a speed of 16 knots is required, the turbine
is much more economical than the cylindrical engines,
but it becomes more expensive if the speed is decreased
below 16 knots. Special observations were made of
the behavior of the turbines and vessel under fluctualting conditions. On no single accession was those area ing conditions. On no single occasion was there any sign of propeller racing and it was only when traveling at the highest possible speed that any vibration over the screws was experienced, and then it was very slight. Far steadier running was obtained, even in the roughest weather. Not the slightest trouble was experienced with the machinery and the turbines did not have to be stopped for any purpose throughout the voyage except when coaling at ports. Nor did the necessity arise for repairing or renewing any part of the machinery. This is the longest journey that has ever been covered by a turbine-propelled steamer, and the steady running of the vessel under all conditions of weather constituted one of the most prominent features of the journey. Anticipations have of weather constituted one of the most prominent fea-tures of the journey. Anticipations have been enter-tained that although this machinery has proved far-more economical in regard to fuel consumption than reciprocating engines for vessels engaged in coast and short-distance traffic, it would prove more expensive for ordinary long-distance voyages. The trip, how-ever, has proved the opposite to be the case, and estab-lished the superiority of the turbine for long-distance traffic under all conditions. traffic under all condition

The British consul at Lyons states that the transmission of electric power over considerable distances is developing, and it is stated that 3,000 horse power is to be transmitted from the Alps, distant 100 miles from Lyons, for the working of the tramway company. The British vice-consul at Grenoble reports that a considerable quantity of electric power is sin. To be purposed in that district at a closer were for the suppression. chased in that district at a cheap rate for the purpose of establishing manufactories of all kinds

#### A TREE ON STILTS.

Lake County, to the north of San Francisco, is so named from Clear Lake, which is the largest body of fresh water in the State of California. In this region may be found much fine lake and mountain scenery, for which reason it has been called the "Switzerland of America." Clear Lake is about thirty miles long and ten miles wide in its broadest part. While on a visit there last summer the writer came across the remarkable tree shown in the photograph. It is an oak growing near the edge of the lake, the waters of which have washed away the soil from the roots, and then, receding, have left the tree supported on stilts, as it were. Several other trees on the shore of the lake present c. similar appearance, but the one shown was the handsomest and also the most free from surrounding trees or brush.

#### FIRE PROTECTION FOR SNOWSHEDS ON THE CENTRAL PACIFIC RAILROAD.

HE R. L. PRESERVE.

Among the difficulties encountered by the early railroad builders of the West was the heavy and long-continued snowfall of the Sierra Novada Mountains which, in some winters, aggregates 60 feet in depth. The history of the invention of the snowsheds by the engineers of the Central Pacific Railroad is already well known, and reference has been made at various times to the developments in these unique structures, brought about by peculiar conditions which could not easily have been foreseen. The snowsheds were

have been foreseen. The snowsheds were first built, as naturally suggested itself, with steel roofs and in section somewhat similar to that of an ordinary house, but it was found that the unbalanced weight of the snow on one side or the other, especially on side-hill work, caused continual trouble by throwing them out of line down hill. The next step was to anchor the sheds back to the side-hill with heavy rods attached to the framework of the shed and sulphured or otherwise secured to the rock or

earth of the cut. It was however, that the would melt from beneath the rods, and on the adjacent ground and roof of the shed, so that the entire mass for many feet in depth would hang upon the rods, bending them down and pulling the sheds toward the bank, throwing them out of line in a direction opposite to that which occurred when there were no rods. This brought about a further development, that of extending the roof, where it was practicable, into the ent banks, forming a shed which prevented the wedge of snow from piling in between the building and the bank. Many of this form are atili in This



A TREE ON STILTS.

found to be of such advantage that it suggested the present typical shape, which is that of a flat roof, making the top of the shed somewhat wider than the bottom, so that the melting wedge of snow falls away from the side of the shed instead of pressing against it, and so that the weight upon the base is increased to prevent overturning.

This form of roof of necessity brought the roof covering closer to the stacks of the engines and increased the liability from fire in the dry-summer con. To obviate this, deflectors are attached to the smokestacks of the locomotives for the purpose of throwing the sparks to the side instead of straight up against the roof. The deflectors are so hung that they can be thrown to one side when the engines are not in the

There still remained the danger from bree and forest fires, from which cause most of the fires now take place, although the right of fires now take place, attnough the right of way is kept clear of brush and trees. Onether Central Pacific Railroad, there are thirty miles of continuous snowship which, was others in isolated spots, bring the total up to about thirty-three miles. With the advent of the snow plow, it was presumed that the she could be ultimately done away with, but need the summit of the Sierra Nevadas the track is subject not only to blockade from snow, but also from avalanches containing rocks, trees etc., carried along with the sliding snew Against these the snow plow is of no avail and during the long-continued heavy storm only snow plows could use the tracks, to the exclusion of traffic, as otherwise the de ep cuts would fill behind the plows almost immediately. It seems, therefore, to be impracticable to dispense with the snowsheds in this am tion of the country, in which the snow upon the ground in some years from Novem ber till June.

The stretch of road subject to such conditions is comprised within a distance of thirtythree miles, lying about equally on each side of what is known as the "Summit," or statica at the summit of the Sierra Nevada Moun-

tains on the Central Pacific Railroad. Considering this long distance of continuous shed, a danger of great loss and delay due to fires constitutes a continual menace to operation. To take care of this, a very elaborate system of watchmen, connected with each other and with various intermediate points by teiphone, and an alarm signal system have been devised. There are seven of such watching or lookout stations at which watchmen are stationed day and night. From

one of these—Red Mountain—several miles from the track and two thou sand feet above it. nearly the entire line of sheds is visible. There are maintained at all times three fire trains-one at Blue Canon, one at the Sumi and one at Truckee-and a fourth during the dries part of the summer al making train at each end of and two near the middle of the sheds. These trains are always ready, with steam up and crews at hand consists of a lo tive, fire-fighting brigade, water cars, with the prompt notice received, can get to any point within a very few inutes and extinguish a (Continued on page 466.)



felescopic Shed, Partially Opened.



Looking Through Telescopic Snowsheds.



Telescopic Snowshed Entirely Closed.

chei the ides hose the

rush the t of cthe cirty with p to of t of needs near rack but sees, ow, russ the cuis ediable needs n

One of the marvels of the earth is the gigantle geyser located at Rotorua, New Zealand, and known as "Waimangu."

Waimangu made its appearance about a couple of years ago. It is situated along the line of that great volcanic rent or fissure covered by the fearful eruption of Mount Tarawers in 1886, and is a short distance from the site of the one-time famous pink and white

terraces of Rotomahana, whose beauties were com-pletely swept out of existence by that awful upheaval. The crater out of which Waimangu issues is fully half an acre in extent, and of enormous depth. When in cruption the whole of this gigantic funnel is alled



"Hell's Gate," a Pool of Boiling Mud. 🚡



The Wavicki Goyser.




The Great "Waimangu" Geyser.



The "Old Man." Height 70 Feet.



The "Wine Glass"-a Great Limestone Formation.

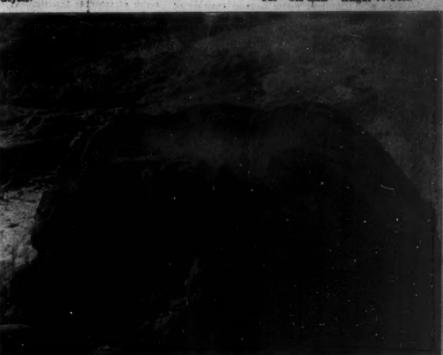

A Characteristic Geysor in New Zealand's Wonderland.

THE NATURAL WONDERS OF NEW ZEALAND.

with a huge column of black, boiling mud and stones that shoots in the air to a height of nearly a thousand feet, while the cloud of steam which accompanies it rises in calm weather several thousand feet. The displays of this colossal geyser occur with great suddenness, and frequently the venturesome visitor has to flee to a place of safety. To see it in eruption is the sight of a lifetime. The awful force manifested by the ejection of the vast body of water and stones, the terrific roar of steam and hurling rocks add to the weird grandeur of the phenomenon. No one can look on Walmangu without being awed by its force and sublimity.

Waimangu is really located in the center of the marvelous hot lakes and thermal springs region, Rotorua district, the tourist or sightseer being conveyed thither in a few hours by train from Auckland, the former capital of New Zealand and the principal port of the

So much has been said and written about the hot lakes and thermal wonders, that it would be almost waste of time and ink to describe them lengthily. Pools and springs of every degree of heat are to be found. Some are boiling caldrons, others are spluttering pits of mud and sulphur, sending up clouds of steam and sulphurous fumes, while others again are of the clearest green or deepest, pure blue, beautiful beyond comparison. The curative powers of these hot springs are becoming widely recognised, for they act like a charm on skin diseases, rheumatism, gout, dyspopsis. Thousands of invalids come from far and near, and thousands of ourists come to this district, which teems with natural wonders. The enchantment of this curious region is also added to by the fact that it is the home of the Maori, and is fraught with the legends and traditions of that noise rece.

New Zealand may be said to be honeycombed with natural phenomens, and not least among which are the peculiar-shaped limestone formations of the north of Anckland and southern Otogo districts, which in many instances are caused by the action of ocean waves, as illustrated by the photograph of the "wineglass." In the Otogo district, however, there are veritable land "cropa" of such formations, of various-heights, the one depicted in the photograph being seventy feet, and known as the "Old Man."

## FIRE PROTECTION FOR SHOWSHEDS ON THE CENTRAL PACIFIC RAILBOAD.

(Continued from page 464.)

fire without much difficulty; for instance, during a recent summer, the total loss through fire was extremely small—not over \$100 total at the outside; but occasionally, in spite of all precautions, the fire will get under way and destroy some miles of shed before it can be stopped. It has been found that, in such cases, the only effectual way to stop a fire is to tear down a gap of from 50 to 100 feet in length, which prevents the remainder of the shed acting as a chimney and drawing the flame along, as it does when uninterrupted, with great velocity, the heat being so finense that it destroys not only the rails but the ties buried in the ballast.

The recurrence of these fires, with the heavy loss entailed by them through loss of property and delay to traffic, suggested the idea to the maintenance-of-way officers of the Southern Pacific Railroad Company of supplying gaps at suitable intervals along the line which can be closed before the winter storms set in. This consideration brought out the design which the npanying drawing and photographs illustrate. The or telescopic sheds consist of sections 50 feet sections 50 feet long and sometimes two sections 50 feet long of mov shed running on wheels on a track having a gage of 16 feet 8 inches, the rails being supported on sills outside the ballast line of the main track. These telescoping pieces are arranged to run inside a section at one oth ends of the gap, built larger for that purpo During the winter, the sections are closed and extra braces of sufficiently stout construction are bolted on, and the shed is then continuous and of practheally the usual construction. As soon as the heavy storms are over and the snow has practically ceased falling for the winter, the dotted braces are removed and the telescopic shed slid into the adjacent large section, using for the purpose a switch engine, a few men with block and tackle, or a work train.

These movable or telescopic sheds are intended to

These movable or telescopic sheds are intended to be placed at distances of from 2,000 feet to a half mile apart in places favorable to their location. They are not necessarily built upon tangents. In fact several of them are upon curves, but the curvature of the track, must be unchanged over the gap and within the enlarged section adjacent thereto.

The Southern Pacific Company new has in position come eixteen of these telescopic anowahed sections, and so far they have proved successful in stopping the progress of any fire which has gotten beyond control and will undoubtedly prevent the destruction from this cause of more than one section at a time at the worst. Credit for these snowsheds should be given to Mr. Issaes, of the engineering staff of the railroad.

Engineering Notes

Spain produced 175,109 tops of lead in 1903, exceeding the output of all other countries except the United States. Mexico is the third largest producer, and Australia comes fourth in order.

It has been found that a rod of tin-aluminium alloy, when filed and plunged in cold water, gives off-gas composed of hydrogen and oxygen in explosive proportions. An unfiled rod, on the other hand, has no action unless the water is boiling. This peculiar behavior of the metals may be explained by the different states in which they exist, says the Engineering and Mining Journal. It is believed that the aluminium and tin form a true-alloy only at the surface of the rod, so that by filing an almost infinite number of junctions of the two metals are laid bare, which act as thermocouples.

The construction of the Berber-Suakin railroad in the Sudan is being pushed forward with all speed. The Sudan government is contemplating the establishment of the Red Sea terminus at Sheik Barghut, a port some distance north of the originally intended terminus of Suakin. This decision is influenced by the superior accommodation available at the former point for larger ships than can be handled at the port of Suakin, while navigation can also be carried out during the day or night. The track is being laid from the Red Sea end. This section presents many engineering difficulties, as between Suakin and Sinkat the line rises to 3,600 feet above sea-level. Automobiles are also being introduced at Khartum, specially designed for passenger traffic in the desert. Great difficulty has been experienced in finding motor cars capable of traveling over the sand. Recent experiments, however, it is anticipated, will have resulted in the employment of an automobile suitable for service under these adverse conditions.

An interesting and powerful type of ice-breaking steamer has been launched on the River Clyde, to the order of the Canadian government, for work on the St. The vessel measures 245 feet length by 40 feet 6 inches beam and 18 feet denth, with a gross tonnage of about 1,350 tons. The vessel is of abnormal strength in order to resist the enormous ice pressure to which it will be subjected. At the bows where the maximum pressure will be exerted, the shell plating is of double thickness, with intermediate frames extending all fore and aft. The keel stem post, propeller brackets, and rudder are also extra strong and heavy and made of nickel steel. On the stern post is fitted a massive cast-steel knife for the dual purpose of cutting a passage through the when driven astern and protecting the rudder stock Water ballast is provided for in a cellular double bottom and so arranged that the boat can be trimmed in any manner to assist in the forcing of a passage while work. The craft is propelled with twin screws. Although primarily designed for ice-breaking work. the vessel is at the same time built with fine lines in order to render a high speed to be obtained for other urposes, such as a government yacht.

A special commemorative grand orize was awarded to the Pennsylvania Railroad system for its original series of scientific investigations of locomotive per formance conducted at the Louisiana Purchase Exposition. The Committee of Five, composing the Supe was unanimous in this action. In the De partment of Liberal Arts a grand prize was awarded for the model of the terminal passenger station in New York city. In the Department of Transportation Exhibits there were each awarded a grand prize the locor testing plant and laboratory, the railway postal and mail car, the model of the West Philadelphia terminal, the model of the New York and Long Island Railroad tunnels, full-sized section of tunnel under the No River, exhibit of maps and drawings illustrating improvements made on the Pennsylvania Railroad commemorative gold medal was awarded in connection with the exhibit of the De Glehn four-cylinder balanced compound locomotive. In the Department of Social Economy were awarded a gold medal for the exhibit of the pension, relief and saving fund departments of the Pennsylvania Railroad and the Pennsylvania lin west of Pittsburg; a gold medal for the exhibit of the Pennsylvania Railroad Department Young Men's Christian Association of Philadelphia. The most im-portant of these awards is the first. This award is unique and special, and as such may be regarded as the highest official award made by the exposition. It not for an exhibit, but is a special recognition of . e ssiveness of the Pennsylvania Railroad syst in making, at its own great cost, investigations of the highest scientific value, the methods and results of which are a permanent contribution to the advance ment of engineering knowledge. The Pennsylvania Railroad system chose an advisory committee of inter-national character to aid in conducting the investigations and selected for test locomotives of foreign as well as of home manufacture, in order that the investigations should be made upon broad lines and under the best conditions to produce useful and authoritative results.

## Employment Under the Isthmian Canal

On November 15, 1904, the President, by executive order, placed the employés of the Isthmian Canal Commission under the provisions of the civil service act and rules, except persons employed merely as laborers, persons whose appointments are confirmed by the Senate, and engineers detailed from the United States army. This order, however, excepts from the requirement of competitive examination a number of positions specifically enumerated. With these exceptions all positions of whatever character or designation under the Canal Commission, whether in the United States or upon the Isthmus of Panama, are subject to the requirement of competitive examination. Vacancies in clerical and other positions in the office of the Canal Commission in Washington will be filled as far as practicable from suitable existing registers of eligibles, but for positions on the Isthmus of Panama examinations will be held at various cities throughout United States and also upon the Isthmus, as needs of the service may require. Qualified eligibles on existing registers may, however, be certified to such positions in the absence of registers prepared as a result of special examinations for the Canal Commis sion. At the present time the number of employes needed in many branches of the work cannot be definitely stated, but as rapidly as the needs of this serv known, examinations will be announced indicating the particular requirements of the positions to be filled, the salary to be paid, and other information.

The age limits for entering the service are eighteen to forty years, unless otherwise expressly stated in announcements of examinations. These limits, however, do not apply to applicants entitled to claim of preference under Section 1754, Revised Statutes.

For the further information of applicants and others, the following statement is published relative to conditions of employment on the Isthmus of Panama under civil service rules by the Isthmian Canal Commission.

The construction of the Panama Canal may extend throughout a time period of eight or more years, according to the details of the project yet to be adopted. (This time estimate is from the report of the last Isthnian Canal Commission.)

The civil service of the Isthmian Canal Commission offers excellent opportunities to qualified persons, both in the matter of salaries and promotion. Under the operation of the civil service law it is contemplated that promotions will be made upon the basis of merit from the lower to the higher positions.

Medical attendance, medicines, and care at hospitals when sick, are furnished to the employes of the Isthmian Canal Commission without cost. Well-equipped hospitals will be maintained at Ancon, adjacent to Panama, and at Colon. In meritorious cases sick leave on pay may be allowed, in addition to the regular leave of absence, not to exceed thirty days for employes who are from the United States, or fifteen days for employes who are residents of the Isthmus.

The Isthmian Canal Commission furnishes quarters to its American employes, or at its option in lieu thereof commutation, which has tentatively been fixed at eight per cent of the salary. The Commission proposes to maintain a civil commissary department on the Isthmus, which is soon to be established and the advantages of which are to be made available to the salaried employes of the Commission.

The Isthmian Canal Commission furnishes its employes free fransportation to the Isthmus from either New York, New Orleans, or San Francisco, and, also, free return transportation upon completion of satisfactory service.

The employes of the Isthmian Canal Commission are allowed six weeks' leave of absence annually on full pay. This leave of absence is not granted until after eight months of satisfactory service. In visiting the United States on leave, employes and members of their immediate families are granted special rates to the above-named ports. (The prevailing special rates to the above-named ports. (The prevailing special rates are \$25 between New York or New Orleans and Colon, and \$70 between San Francisco and Panama.) The special rates also apply when members of the family of an employe accompany him to the Isthmus.

All salaries or wages paid by the Isthmian Canal Commission to employes from the United States are in gold or its equivalent in United States currency.

All inquiries concerning examinations for competitive positions under the 1sthmian Canal Commission by ould be addressed to the United States Civil Service Co. Tolssion, Washington, D. C.

Fu. - or communication relative to service, situation, climate, a. 4 conditions on the Isthmus should be addressed to the Isthmian Canal Commission, Washington, D. C., by whom the foregoing details have been furnished.

A HOVEL ADAPTATION OF THE ARCHIMEDRAN SCREW.

An ingenious inventor has revived the old principle of the Archimedean screw, and adapted it for use as an amusement apparatus for pleasure resorts, fairs, and the like. It will be recalled that the screw which Archimedes is accredited with having invented was a spiral conduit that rotated on an inclined axis. It was used for raising water, the lower end of the screw being immersed in a body of water, and on being rotated the water would constantly flow toward the bottom of each convolution of the spiral conduit, and

be thereby raised to the upper end of the screw. In the present adaptation of the Archimedean screw, a spiral trough is used, which is supported by a central shaft turning in suitable bearings, also by a series of rollers bearing against the under side of the trough. Traveling on tracks in the trough are cars, each carrying two or three persons, which are lifted up by the rotation of the spiral As in the case of raising water, the car constantly gravitates to the bottom of the particular convolution in which it is situated, but as the bottom is constantly advancing forward and upward, car is likewise progres sively moved forward and upward, until it reaches the of the spiral trough. The tower at the upper end of the screw furnishes a suitable er bearing for the shaft of the spiral trough, and also provides a suitable landing for the passengers. The cars when emptied of passer are carried by gravity down

an inclined plane to the starting point. This inclined plane is not shown in the accompanying engraving, being hidden by the spiral trough. The landing at the top of the tower comprises an annular platform, which surrounds the passenger drop. The latter consists of a circular car formed with a nut which is threaded on to a simple, vertically-disposed screw. In operation the car will move downward by gravity, and at the same time will turn with the nut around the screw. The nut is formed of two sections which, under control of the operator, may be moved together to tightly grip the screw, and thus act as a brake to prevent too rapid a descent of the car. The car is raised by counter-weights when relieved of the weight of the passengers, and when the operator relaxes the strain of the nut on the screw. The apparatus should afford considerable entertainment. The pacsengers first experience the unusual sensation of having a spiral trough whirled rapidly about them, while they advance slowly and in a straight line up to the top of the tower, and then in descending they experience

another unusual sensation just the reverse of the first, as they wind rapidly downward around the stationary screw. The inventor of this apparatus is Mr. John J. Carr, of 282 Van Brunt Street, Brooklyn, N. Y.

#### A RIVER OF FISH.


Lake County, one of the most picturesque of the northern counties of California, is so named from Clear Lake, the largest body of fresh water in the From its varied scenery of mountain and lake, it has been called the 'Switzerland of America.'

Several creeks run into Clear Lake, one of the principal being Kelsey Creek. Each spring the fish run from Clear Lake up Kelsey Creek, to spawn, ometimes in so great numbers that wagons, in crossing, crush many of them. It happens in some seasons that the dry weather, coming on sud-denly, causes the waters of the creek to subside rapidly. Then the fish are left

stranded and die in countless millions. The farmers cart off wagon-loads of them to use on their fields as fertilizer, and the steach arising from their decaying bodies makes the neighborhood almost uninhabitable. The photograph was made by a local druggist and ey Creek at a point one mile from the town of Kelseyville and seven miles from Lakeport, the

#### A Lost Invention.

Fame and fortune await the lucky individual who

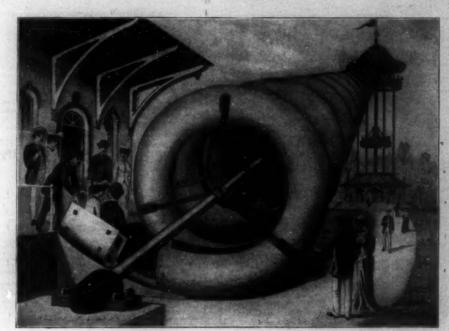

A NOVEL ADAPTATION OF THE ARCHIMEDRAN SCREW.

can rediscover the combination of metals from which the Egyptians, the Aztecs, and the Incas of Peru made their tools and arms. Though each of these nations reached a high state of civilization, none of them ever discovered iron, in spite of the fact that the soil of all three countries was largely impregnated with it. Their substitute for it was a combination of metals which had the temper of steel. Despite the greatest efforts, the secret of this composition has baffled scientists and has become a lost art. The great explorer Humboldt tried to discover it from an analysis of a chisel found in an ancient Inca silver mine, but all that he could find out was that it appeared to be a combina-tion of a small portion of tin with copper. This combination will not give the hardness of steel, so it is evident that tin and copper could not have been its only component parts. Whatever might have been the nature of the metallic combination, these ancient races were able so to prepare pure copper that it equaled in temper the finest steel produced at the present day the most scientifically approved proce

their bronze and copper instruments they were able to quarry and shape the hardest known stones, such as to quarry and shape the hardest known stones, such as granite and porphyry, and even cut emeralds and like substances. A rediscovery of this lost art would revolutionise many trades in which steel at present holes the monopoly. If copper could thus be tempered now its advantage over steel would be very great and it would no doubt be preferred to the latter in numerous industries. It is a curious fact that though this lost secret still baffles modern scientists it must have been discovered independently by the three races which made use of it so long ago."

The above item from a Sun-

The above item from a Sun-day paper is an example of many such floating about which both reflect and impress an exaggerated sense of the importance of a so-called lost invention or art. The writer says: "A rodiscover; of this lost art would revo of this lost art would revo-lutionise many trades in which steel at present holds the monopoly." Why would there be any revolution? Is any man sighing for a copper rasor, or does any boy want a brass jack-knife blade? ere is no evidence to prove that the tempered copper tools of the ancients were cap-able of holding a keen edge like steel; on the confrary, they were probably very crude and unsatisfactory sub-stitutes for what we now have. The United States Government Board, appointed twenty-five years ago to test iron, steel, and other metals, reported through their chair-man, Prof. R. H. Thurston, in that portion relating to co per-tin alloys, that alloys

copper 72.89, tin 26.85, tin 29.88, copper 68.58, tin 31.26; copper 67.87, tin 82.10; and copper 66.54, tin 34.47 were all so hard that they could not be turned in a lathe with steel tools. These and other hard combinations have been generally known to the trade for years, but of what good are they? Copper and its alloys are not coastly than the ordinary grades of tool steel. or wast good are they? Copper and its alloys are more costly than the ordinary grades of tool steel, and the only apparent advantage possessed is that they are incorrodible. It is difficult to understant that this would be the cause for any revolutionary change, and we are forced to the conclusion that such statements are what, in current slang, is known as the conclusion. "hot air."-Machinery.

According to the Iron Age a compound gas engine has been built with two high-pressure cylinders and a single low-pressure cylinder between them. The high-pressure cylinders work on the Otto cycle, the engine receiving one impulse from them each revolution. exhaust from the two explosions is expanded in the low-pressure cylinder, the crank of which is 180 de-

grees behind the high-pressure cranks. Thus at very forward stroke the low-pressure cylinder takes the exhaust gases from one of the high-pressure exhaust cylinders. The total effect is thus to produce an impulse every half revo-lution. With a 12 horseengine 13 brake rse-power were obtained with the low-pressure cyl-inder in use, and only 8.9 horse-power without It. 46.2 per cent being thus added to the power by the use of the low-pressure cylinder and without the expenditure of any additional fuel.

Pennsylvania, which makes more than half the iron used in the United States, produces less than 2 per cent of the fron ore mined. Ohio, which comes next to Pennsylvania as an tron-maker, mines less than 0.1 per cent of the total. In both cases the ore is brought to the fuel; and this is the policy in this country. Only in Ala-bama are the ore and fuel found together.



A RIVER OF FISH-RELSEY CHEEK, CALIFORNIA

## RECENTLY PATENTED INVESTIONS.

Riccircal Devices, COMBINATIONAL TELEGRAPH INSTRU-COMBINATIONAL TELEGRAPH INSTRU-MENT.—F. GORALES-BARDOSA, Panama, Pan-ams. The invention relates to communication by wire, and mere particularly to the production of a combinational instrument which may be used at will as a key, a sounder, a repeater, or a commutator. The invention also has reference to a system of wiring whereby this instrument may be connected for use in various relations. The apparates is suitable for both open and closed circuits.

#### Of Interest to Farmers

Of Interest to Farmers.

COTTON CHOPPER AND CULTIVATOR.

J. A. BARLETT, W. S. Downs and J. B. TIL

MAN. Derdancile, Ark. In this patent the i
vention relates to agricultural implements, at

cospecially to the class of cultivators. To

object of the inventors is the provision of a

implement of simple construction intended a

the purpose of chopping or thinning cotton

the field, the invention adapting itself readi

to be applied to an ordinary cultivator as a

artiachusent.

ANIMAL-FEEDER.—P. E. HOWARD, Hitch cock, Okiahoma, and C. F. Howard, Deep water, Mo. The invention refers to improve water, Mo. The invention refers to improvements in devices for supplying feed to animals, particularly hogs, an object being to provide a feeder adapted to supply shelled corn, bran, meal, or other food to a trough from which animals feed and so arranged that the flow of meal 40 the trough may be adjusted for the food 41 countains.

food it contains.

ANIMAL-STALL,—W. M. UNDMRHILL, Occuto, Wis. One purpose of this inventor is to economise in the cost of construction of stalls and to provide each stall with an adjustable front bar placed far enough back to touch in front of the withers when the cow is eating from the floor or a low manger and to touch the lower part of the throat when the head is above the bar, such cross-bar being also placed no far back as to render it necessary for the cow to swing her head to the right or ieft crosswime of the stall when changing from one position to the other.

DIE.—G. KEPPER, New York, N. Y. In this instance the invention of Mr. Kepper, has reference to an improved apparatus for etamping articles from flat metal stock. It is especially intended for stamping in high relief images and the like on metal plates or disks for jeweigy or for various other purposes.

CONSTRUCTION OF PALSE BEAMS, INTERIOR CORNICES, OR THE LIKE.—W. NIELBOX, New York, N. T. The object here is to provide certain improvements in the construction of false beams for ceilings, interior cornices, and like structures employed for embellishing the appearance of a room, the arrangement being such that the structure is freproof, can be given any ornamental shape, can be readily placed and secured in position on the ceiling or wall, and cheaply manufactured.

PORTABLE DARK ROOM.—E. In Hall.

PORTABLE DARK ROOM.—E. L. HALL, New York, N. Y. The purpose in this invention is to provide a collapsible dark room, one which cau be compactly and flatly folded and conveniently carried in a dress-sult case, for example, and quickly and readily set up and braced in said set-up position. Further to provide sleeves at the ends of the device constructed of pliable material and arranged to fold into the body of the device when it is collapsed and so that when the arms of the operator are introduced the hands are free, yet a light-tight connection obtained between the arms of the operator and the sleeves.

DOOR-BRACE.—F. DAHLUND, Esmond, N. D. The object here is to provide a brace for trap-doors, such as used in cellars and other places, arranged to permit of conveniently swinging the door upward into an open position and to automatically hold it thereis. It is easily adjusted to suit different sizes of doors, as well as the weight thereof.

WHENCH.—W. V. GAGE, Omaha, Neb. Mr. Gage's invention relates to wrenches and spanners and is especially adapted to the form known as "H-wrenches," as well as to straight wrenches. The objects are to provide a wreach which will be adapted to operate upon nuts and bolt-heads of different slass and thicknesses without the use of complicated adjusting devices and with a corresponding simplicity and cheapness of construction.

#### hines and Mechanical Devices.

Machines and Rechanical Devices.

MACHINE FOR LAYING CABLES ON
WINDING-DRUMS.—A. F. WHEATON, Mealo,
Weath. This invention relates to improvements
in mechanism for laying cables on the winding,
drums of logging-engines, hoisting-engines, and
the like, the object being to provide an automatically-controlled device by means of which
the cable will be placed on the drum in even
layers while moving in either direction along
the drum, thus preventing injury to the cable
by overlapping.

#### Pertaining to Vehicles.

FELLY-JOINT.—J. B. HIGGINDOTHAM, man, Cleveland County, O. T. In this ins the invention relates to an improved devicementing the sections of a wheel-felly so the nocessary tension may be exerted on sections to draw them forcibly together produce a rigid, self-sustaining felly, with the addition of the tire emcirclin forms a most secure and durable structure.

Nozz.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of the paper.

#### Business and Personal Wants.

READ THIS COLUMN CARRFULLY,—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. In every rease it is necessary to give the number of the inquiry. of the inquiry.

Marme Iron Works. Chango. Catalogue from

Faquiry No. 6318, For manufacturers of mud guards or femders made of paper or similar substance, for use on automobiles.

APTOS.-Durres Power Co., Beading, Pa.

Inquiry No. 6319.-For manufacturers of wall paper printing machinery.

For hoisting engines. J. S. Mundy, Newark, N. J. Inquiry No. 6329.—For manufacturers of or dealers in shot tower machinery.

"U. 8." Metal Polish. Indianapolis. Samples free.

laquiry No. 6391.—For makers of punch machines, benders and presses, complete, for making "H. 8."; also for the present address of the Chahal Bolist Co.

Perforated Metals, Harrington & King Perforating Co., Chicago.

Inquiry No. 6392, -For makers of glass paper weights and other novelties of a like kind. Handle & Spoke Mcky. Ober Mfg. Co., 10 Bell St., hagrin Falls, O.

Inquiry No. 6323.—For makers of aluminism pin trays, also other aluminum novelties.

Adding, multiplying and dividing machine, all in one. Felt & Tarrant Mig. Co., Chicago. Inquiry No. 6324, Wanted, the address of the following concerns: Eclipse Gun Co., Laclede Arms Co., Royal Gun Works, Burgess Gun Mfg. Co.

Sawmill machinery and outfits manufactured by the ane Mfg. Co., Box 13, Montpelier, Vt.

Inquiry No. 6225. For manufacturers of potters whose and general machinery for manufacturing por-

inquiry No. 6326.—For manufacturers and exporters of bungs for kegs, barrels, etc., also for about page.

We manufacture tripoli stones of all dimensions, iso, cylinders, etc., samples free. Senson Filter Co.,

Inquiry No. 6337 .- For machinery for boring and siling breakes in general for scrubbing, store and The celebrated "Horneby-Akroyd" Patent Safety Ori Ingine is built by the De La Vergne Machine Company. Foot of Reat 18th Street, New York.

Inquiry No. 6398. For parties engaged in manufacturing Indian clubs, balls, etc., from cork.

Any metal, abeet, band, rod. bar, wire; cut, beet crimped punched, stamped, shaped, emboased, letter-ed. Dies made. Metal Stamping Co., Niagara Falis, N.Y. Inquiry No. 6339.—For the present address of the Brown Cochran Carbonic Gas Machine Co.

I have every facility for manufacturing and market-ing hardware and housefurnishing specialties. Wm. McDonald, 39 Main St., East Rochester, N. Y. Inquiry No. 6330.—For an automatic telegraph transmitter.

We manufacture gasoline motor and high-grade ma-chinery, eastings best quality gray iron. Select pet term, and let us quote prices. Frentier Iron Works, Buffalo, N. Y.

Inquiry No. 6331.—For makers of gazoline ma-

anufacturers of patent articles, dies, metal stamp-serow machine work, hardware specialties, machin-and tools. Quadriga Manufacturing Company, 16 th Canal Street, Chicago.

Inquiry No. 6339. For makers of electric ther-

The SCIENTIFIC AMBRICAN SUPPLEMENT is publishing a practical series of illustrated articles on expensional electro-chemistry by N. Monroe Hopkins.

Inquiry No. 6:133.—For the manufacturer of the Ideal Shine Cabinet for blacking shoes.

Ideal biblic Cabinet for blacking shoes.

Drawings. Retinates. Tools, Dies. Sheet. Wire and.
Rod Specialties (all metals). Stamping, Spinning, Turning and Serew Work. Tin Plating. Nickel Plating,
Bronsing, etc.

The W. S. Burn Mfr. Co.,

New Haven, Conn.

Inquiry No. 6334.—For makers of the handy potato and fruit alicer, having a plain bottom with fluted corregated knife, with sliding holder for holding the vegetable.

Inquiry No. 6335 .- For information as to supply of infraorial earth, calcined and free from grit or im-Inquiry No. 6336.-For makers of p

Inquiry No. 6337.—For an air pump to be us and for exhausting a glass tube.



HINTS TO CORRESPONDENTS.

and Address must accompany all letters or attention will be paid thereto. This is for r information and not for publication. our information and not for publication.

[aveause to former articles or answers should give date of paper and page or number of question.

miries not answered in reasonable time should be repeated; correspondents will bear in mind that some naswers require not a little research, and, though we endeavor to reply to all either by letter or in this department, each must take his turn.

wishing to purchase any article not adver-ed in our columns will be furnished with Ireases of houses manufacturing or carrying

distributed in the same.

cial Written Information on matters of personal rather than general interest cannot be expected without remaineration.

had at the office. Price 10 cents each. oks referred to promptly supplied on receipt of price. search sent for examination should be distinctly marked or labeled.

(9509) R. W. M. says: Has not electricity been used long enough as energising force for running machinery and power plants, so that machinery and power plants thus worked, operated, energized, and installed should be expressed by a different word than "electrify" and its derivations? The common meaning of "electrify" is "to thrill," technical meaning "to charge with electricity," and it is not bard to find it in the Greek compound "electron" and "ergon," the latter being well anglicised in the word "en-ergy" and its derivations. Am I not right, thinking that a machine would run longer, stronger, and steadier electricitied than it would if only electrified, that is, simply charged with electricity? A. It is all right to make a new word as a name for a new thing or fact. Feople will use it or not, however, as they choose. "Electrigize" does not suggest its derivation from "ergon" and "elektron," the two Greek words, since the essential letter "r" of ergon does not appear in it. We hardly think people will take to the proper form of the derivative, which should be "electrigize." It has an awkward sound. (9509) R. W. M. says: Has not elechas an awkward sound.

the derivative, which should be "electrigize." It has an awkward sound.

(9510) C. S. asks: 1. I have a small induction coil. Length between end pieces 3 inches; core, % inch thick. Primary, three layers No. 18. Secondary, 5 ounces No. 30. Condenser, twenty sheets tinfoil 3 x 3 inches. This coil gives powerful shocks, but will not spark at the secondary. The vibrator does not buss good. Is the core too small? I use one dry cell. Is it possible to work it with a telephone generator, thus doing away with the vibrator? A. Your little coil may give a spark ¼ inch long if you put on more battery. Two or three cells of dry battery will be required for it, since dry cells are very weak affairs. The vibrator will work more forcibly if more current is given to it. The core is not magnetized strongly enough to break the circuit quickly. 2. How can you tell the proper amount of sinc sulphate and blue vitriol in a Crowfoot cell without a hydrometer? A. The copper sulphate solution in a Crowfoot battery must be caturated, and there must be crystals of the sulphate still remaining undissolved in the bottom of the jar on the copper plates. No sinc sulphate still remaining undissolved in the bottom of the jar on the copper plates. No sinc sulphate sell some the cell at first. Put only water round the sinc at the top of the jar, and short-circuit cells will not ring a bell? A. Two Crowfoot cells will into ring a bell? A. Two Crowfoot cells will into ring a bell? A. Two Crowfoot cells will into ring a bell? A. Two Crowfoot cells will ring a bell whose resistance is low. If the resistance is high, more cells will be required to send current enough through the bell to ring it. 4. Is the powdered carbon that is packed around the carbon, it might be used for any length of time.

(9511) T. J. W. says: 1. What is the reduction in volume of compressed air to 100 nounds. (9510) C. S. asks: 1. I have a small

(9511) T. J. W. says: 1. What is the (9511) T. J. W. says: 1. What is the reduction in volume of compressed air at 100 pounds? A. Compressed air at 100 pounds pressure filis 0.128 of its free volume. 2. What reduction is volume at 50 pounds? A. At 50 pounds pressure 0.227 of its free volume—isothermaily. 3. (a) How many cylinders of a given size (say 3 x 6) would be required to compress air sufficient to run an ordinary reciprocating silde-valve engine of the same size, all running at same speed, engine carrying load at 200 revolutions per minute, compressors to maintain pressure of 100 pounds? Inquiry No. 6337.—For an air pump to be used by hand for exhausting a glass tube.

Inquiry No. 6378.—For makers of railread tricepted for hand care.

Inquiry No. 6338.—For makers of saltread tricepted for hand care.

Inquiry No. 6339.—For makers of saltread tricepted for hand care.

Inquiry No. 6339.—For makers of saltread tricepted for hand care.

Inquiry No. 6340.—For makers of square expectables.

Inquiry No. 6341.—For makers of square expectables.

Inquiry No. 6341.—For makers of square expectables.

Inquiry No. 6341.—For makers of hardware specialise for household use.

Inquiry No. 6342.—For makers of mechanical and solution for the compression. Inquiry No. 6343.—For makers of stationery specialise for household use.

Inquiry No. 6343.—For makers of stationery specialise for household use.

Inquiry No. 6343.—For makers of stationery specialise for household use.

Inquiry No. 6343.—For makers of stationery specialise for household use.

Inquiry No. 6343.—For makers of stationery specialise for household use.

Inquiry No. 6344.—For makers of stationery specialise for household use.

Inquiry No. 6344.—For makers of stationery specialise for household use.

Inquiry No. 6341.—For makers of stationery specialise for household use.

Inquiry No. 6341.—For makers of mechanical and solution for the compression. The loss may be 50 per cent. For makers of stationery specialise for household use.

Inquiry No. 6343.—For makers of stationery specialise for household use.

Inquiry No. 6341.—For makers of stationery specialise for household use.

Inquiry No. 6341.—For makers of stationery specialise for household use.

Inquiry No. 6341.—For makers of mechanical and structure. If used the temperature. If used cold, the temperature is a many will be required to keep up the air supply. The same relation of cylinders.

Inquiry No. 6344.—For makers of stationery specialise for household use.

Inquiry No. 6345.—For makers of stationery specialise for household use.

Inquiry No. 6341.—For makers of square expectation of compressi

#### HEW BOOKS, ETC.

Wire and Wireless Telegraphy. By Bo win B. Moore. Springfield, Vt. Springfield Reporter Publishing Com-pany, 1904. 12mo.; pp. 38. Price, to cents.

cents.

This little pamphlet was written by a bey of sixteen years of age. In it he endeavour to give a brief but intelligible description of the science and mystery of the electrical telegraph, its practical applications and developments. The book is illustrated with a number of cuts, and is an interesting résume of the subject.

FORGE PRACTICE. By John Lord Bae New York: John Wiley & Sons, 19 London: Chapman & Hall, L 12mo.; pp. 257; 272 figures. Pri \$1.50

\$1.50.

This book is intended for the aid of students in shop work. It contains many practical illustrations of methods employed in all kinds of forging, welding, tempering, etc., as well as interesting chapter on the metallurgy of iron and steel, which is illustrated with cuts from the Scientific American. The book will be found a practical aid to beginners in the working of iron.

0

#### INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending December 13, 1904

AND EACH BEARING THAT DATE

E		-
g-	Acid, manufacturing nitric, H. Pauling. Advertising device, W. J. Paulsen	777,486 777,488 777,488 777,588
3 W		
Į.	Animal trap, H. Williamson Article carrier, A. H. Stuart Assay button dropper, E. Keller, et al Angur twiating machine, I. Wantling	777, 461 777, 366 777, 421 777, 576
e	Automatic morrentor, a. mechani illini	777,120 777,430
y	Axle, C. P. Clark Axle, car wheel, T. B. Timby Baby jumper, J. A. Morehouse	777,343 777,540 777,386
1	Bag closure, E. E. Mead	777,960 777,967 777,427 777,491
3 e	Bait holder and fish decoy, V. Le Beau Bailing press, Jones & Schafer Barrel bolder, Wolts & Suman Basins, fastening device for stationary	177,380 177,460 1777,460
t	Battery case, R. H. & F. H. Wappler Bearing, car axie, J. E. Hewitt	777,586 777,457 777,507 777,519
i t	Boot and the second of the sec	777,479 777,284 777,075 777,123
y	Beet topping machine, D. D. Sr., & W. D. Buchtel, Jr. Bird trap, S. W. Wilt Blank feeding mechanism, J. R. Scott	777,386 777,579 777,556
y e k	Blanket or strap fastener, Z. T. Beatty Blast furnace, J. Coyne Blind fastener, T. A. Upson Block signal system. T. Silvene	777,586 777,488 777,189 777,358
	Bolier furnace, steam, M. J. Carrigan Bolt anchor, F. C. Palmer Book, combined serap and invoice, C. E. Blodgett	777,331 777,134 777,650
1	Bottle, Y. P. Lee	717,54% 777,42% 777,42%
	Bottle, H. G. Leva Bottle, L. Wampler. Bottle, non-redilable, L. Wampler. Bottle, non-redilable, L. Wampler. Bottle, non-redilable, M. M. De Gredy. Bre Manon, reissue mateally adjustable, M. Berger. Brake beam, E. I. Dodds Braning, L. H. Schaap Braning C. H. Schaap Braning C. J. Schneible Brick mold washing machine, J. E. Fox. Brick mold washing machine, J. E. Fox. Brick mold washing machine, J. E. Fox. Buchet, Fickinger & Blake Buchle, W. Griest Buchet, Fickinger & Blake Buchle, W. Griest Buchet, Fickinger & Blake Buchet, Fickinger & Blake Buchet, W. Griest Buchet, W. Griest Buchet, W. Griest Buchet, W. Griest Buchet, S. E. Baner, S. C. Berschinger, for, Hoerr & Beerschinger, Margiar alarm, Fickens & Boss Button, shirt, G. S. Eagle Cabinet, kitchen, B. J. Schlanner, Sr. Calipers, taper, Creamer & Knowiton. Call box, J. C. Barclay Canceline stanues and postmarking mail.	12,394 177,370
	Brasing, L. E. Schaap Brasing compound, L. R. Schaap Brewing, J. Schneible Brick mold washing machine, J. E. Fox	777,546 777,547 777,540 777,830
t	Brick molding machine, J. H. Emery Bucket, Fickinger & Blake Buckle, W. Griest Building block, crystal, A. Biberfeld	111,500 111,500 111,500
	Bung holes or the like, temporary closure, fer, Hoerr & Boernehinger.  Harglar alarm, Pickens & Ross.  Button, shirt, G. S. Engle	777,100 777,555 777,181
	Calipers and dividers, combined, P. H. Sanger Calipers, taper, Creamer & Knowlton,	777,643
	Call box, J. C. Barclay Canceling stamps and postmarking mail, machine for, G. W. Whits	##; <b>35</b>
	Cans, tongueless tearing strip for key	777.16
	Car diaphragm, G. S. Wood. Car door fastener, J. C. Wands. Car, dumping coke, Ingoldsby & Bowling. Car fender, E. Sherwood.	TT 155
	Car fender, E. Sherwood Car, railway, Ingoldsby & Bowling. Car sign, trolley, P. McDonald Car, stock, W. F. Ellis Car vestibule and step, W. B. Foster. Car vestibule diaphraga, B. D. Fuller Cars, magnet contact for propulsion of, J. M. Morgan	777,478 777,462 777,614 777,888
		777,194
	J. M. Morgan Carbureter, A. J. O'Shea Carbureter, explosive engine, F. Patee Card or label holder, J. W. Cutler Carrier. See Article carrier. Cartridge, W. Ulrich Carvine, mitation wood, J. Walter.	777.319
-	Casting apparatus, H. G. Underwood Casting apparatus, H. G. Underwood Casting metal, J. H. Forbes	777,341 777,571 777,338 777,668
	Chalk holder and sharpener, combined,	TTT,368
	Check, traveler's certified bank, S. D.	777,413
	Chuck for holding articles to be dressed,	777,458
	Chute, wagon bed discharging, J. D. Dwyer Cigar lighter, J. I. Ayer Clay working machinery, measuring drum	777,004 777,061
-	Krastin & Quigley Chate, wason bed discharging, J. D. Duyer Cigar lighter, J. I. Ayer Clay working machinery, measuring dram for, W. B. Cunningham Clothes rack, N. M. Coyner Coat pad, G. Goldman Cock, cylinder, C. B. Alvis Coin controlled annoratus, J. C. Coceland.	11 081 11 188 11 188 11 188 11 188 11 188
-6	Coin controlled apparatus, J. C. Coneland 7	

100

its ok

DECEMBER 24, 1904.
Commede, douche, S. & M. Fischer 777,10
Commode, douche, S. & M. Fischer. 777.18 Concentrator, and B. S. Bennett. 777.17 Concentrator, solution, J. U. Ldoyd. 777.17 Concrete block machine, G. Bratty. 777.18 Concrete brick pressing machine, H. H. 777.18
Concrete brick pressing machine, H. H. 777,156 Spears Concrete building block forming machine,
o at Stawart
Baymond         771,32           Condense system. F. Ray         771,32           Conveyer. L. Abraham         771,47           Conveyer. W. T. James. 771,575         771,577           Conveyer band, F. Abels         771,52           Conveyer, parcel, L. Abraham         777,52           Transparent         777,52
Conveyer parcel, L. Abraham
Cocking by retained beat, apparatus for, F. Kabn T77,108, 777,109, Cooking machine, can, O. E. Vance, et al. 777,209, Cocking machine, H. F. Frederic T77,500 Cockacrew machine, A. A. Vignos T77, 600 Cockacrew machine, A. A. Vignos T77, 600 Coren: receptacle, B. E. Deane T77, 600 Cream separator, M. Kelley T77, 600 Cream separator, W. Walker J. J. States
Cork puller, T. W. Kennedy Corking machine, H. F. Frederic
Coupling, Matsen & Robertson
Cream separator, M. Kelley
Crushing machine, roll, T. L. & T. J.
Sturtevant
pharms
champ Curb and conduit, combined, B. F. Lockwood Current motor, alternate, V. A. Fynn. 777,594 Currycomb, C. W. Igo Cushion spring support, A. Hirsh. 777,296 Cushioning deview, C. von Fhilip. 777,296 Damper, M. J. Carrism. 777,350 Derallment guard, R. J. Edwards, 777,350 Derrick, portable, W. G. Read. 777,350, 777,150 Derrick, portable, W. G. Read. 777,357,357
Currycomb, C. W. Igo
Damper, M. J. Carrigan
Curb and conduit, combined, B. F. Lockwood  Current motor, alternate, V. A. Fynn. 777,528  Currycomb, C. W. Igo
Derrick, portable, W. U. Mead Die. See Screw threading die. Dies de Screw threading die. Dishs drainer, collapsible, D. E. Jones
Display form, J. T. Brown
Door bolt and lock, barn, O. G. Parsons 777,125 Door check and closer, J. Bardsley 777,303
Door lock, aliding I. N. Sweet
Door or window fastener, E. Homer 777,342 Door stop or holder, J. R. Fletcher 777,408
Dough forming machine, C. F. Dietz 777,335 Dough sheeting and lapping machine, J.
H. Mitchell
Parting appliance, Communication   TTT,407
Drill, G. B. Rich
Dye and making same, blue, Abel & Lat-
Dye and making same, blue, Abel & Lat- tringham  Dynamo, variable sneed, A. J. Farnsworth 777, 323  Dynamo, variable sneed, A. J. Farnsworth 777, 208  Educational appliance, T. H. Thompson, 777, 208  Egg boiling apparatus, E. E. Deane. 777, 536  Electric controller, W. A. Price 777, 536  Electric make and break mechanism, J. C. 777, 164  Electric make and break properties, apparatus, apparatus, apparatus, apparatus, apparatus.
Egg bolling apparatus, R. E. Deane 777,610 Electric controller, W. A. Price 777,538
Electric make and break mechanism, J. C. Waldo
Electric motor speed governing apparatus, H. A. Bond
removing static, W. H. Chapman 777,500 Electricity from paper, yarn, etc., remov-
ing static, W. H. Chapman       777,598         Elevator, H. A. Henderson       777,416         Elevator, T. Stifter       777,558
T. Eaton 777,612 Elevator safety attachment, A. Matter. 777,296 Elevator safety clutch, A. Whelan777,166
Elevator valves, mechanism for operating automatic, K. E. O. Jansson 777,685
Everator safety attachment A. Matter. 777,612 Elevator safety attachment A. Whelan. 777,612 Elevator safety chitch A. Whelan. 777,635 Elevator valves, mechanism for operating automatic, K. E. O. Jansson. 777,635 Elevator valves, operation of automatic, K. E. O. Jansson T. T. C. S. Elevator valves, operation of automatic, K. E. O. Jansson T. T. T. T. C. S. Emergency brake, G. Maclockie. 777,128
Emergency brake, G. Macloskie
Ragine speed regulator, explosive, G. Marx, Jr. 777,295  Envelop machine, B. F. Berry 777,295  Eraser cieuner, blackboard, D. S. Ausberger, 1977, 1979
MILLS ASSESSMENT OF THE PROPERTY OF THE PROPER
Braporating apparatus, multiple effect, 8.  M. Lillie  Excavating cutter, J. B. Cantwell. 777, 114  Excavating machine, J. Helsm. 777, 204  Excertaing ball, J. Minor 777, 204  Exchasting or testing tank, T. J. Cosens, 177, 408  Exhausting or testing tank, T. J. Cosens, 177, 408  Expansion bolt, I. Church 777, 206  Expansion bolt, I. Church 777, 206  Expansion bolt, E. B. Ediner 777, 206  Facche, H. F. Kellner 777, 206  Freed controller, J. D. Wymer 777, 306  Freed controller, J. D. Wymer 777, 306  Freed mechanism, botter, P. Marshall. 777, 319  Freeder, C. W. Thomas 777, 319  Freeder, C. W. Thomas 777, 319
Exercising ball, J. Minor
Expansion bolt, I. Church
Explosive and making same, A. Muller- Jacobs 177, 125  Fasche, H. F. Kellner 777, 225  Fancet, C. A. Smith 777, 205  Foed controller, J. P. Wymer 777, 205  Feed mechanism, boiler, P. Marshall. 777, 315  Feeder, C. W. Thomas 777, 315  Frence, Road J. Ellioft 777, 615
Faucet, C. A. Smith
Peed mechanism, beller, P. Marshall, 777,118 Peeder, C. W. Thomas 777,365 Penev, Bood, J. Ellitott 777,365 Penev, Bood, J. Ellitott 777,365 Penev, Bood, J. Ellitott 777,367 Pereve petre, barbed B. Frost, et al. 777,662 Pertillaer distributor, B. Love 777,561 Pertillaer dropper, P. F. Randolph, 777,461 Pire alarm transmission, automatic, G. B. Bowell 777,067
Pence, float, J. Filliott 777,635 Pence post, J. W. Childs 777,690 Pence wire, harbed, A. B. Frost, et al. 777,621 Pertillizer distributer, B. Lore 777,591
Fertiliser distributer, B. Love
Bowell 777,067  Fire box, removable, Burger & Williams. 777,593  Fire door or shutter, H. T. Moody 777,300
Fire escape, Inclosed or tower, Ballinger & Perrot
Fish buit or lure, F. D. Rhodes
Hort Titles apparatus, B. W. Davis, TT.419 Plaid heating apparatus, B. W. Davis, TT.085 Plaid pressure brake, A. Kapteyn. 777,085 Plaiding table, E. C. Dittmar 777,186 Prame, F. N. Cottle Prame, F. N. Cottle Prame, F. N. Cottle Purpace, W. E. Walnh 777,572 Purpace, W. E. Walnh 777,450 Purpace, Congress of L. Taylor, TT.450
Folding table, E. C. Dittmar 777,186 Frame, F. N. Cottle 777,079
Frame, F. N. Cottle         777,079           Fruit picker, J. Utterback         777,572           Furnace, W. E. Walsh         777,454           Furnace charging crans, O. L. Taylor.         777,450
surmer charging cramel or we and section
Furnace for rosating, smelting, etc., U. Wedge Purnace grate, R. M. Bublo
boller, D. A. Besgan 777,139
Garment fastener, D. Rioux 777.144 Garment hanger, A. H. Sinsheimer 777.354 Garment hanger, E. M. Webster. 777.357 Garment supporter, C. A. Harvey 777.057 Gas barner, antivibratory, J. Franklin. 777.001
Garment Interies, D. Blouz Garment Interies, A. H. Sinshelmer. 777,354 Garment hanger, E. M. Webster. 777,357 Garment supporter, C. A. Harvey. 777,065 Gas burner, antivibratory, J. Franklin. 777,501 Gas burner, cut off. automatic, Tatum &
Gas burner, antivibratory, J. Frankin 777,505. Gas burner, cut off, automatic, Tatum & Parker
Parker   Parker   777,505, 777,506   Gas burner, Incandescent, J. C. F. Jurgens   777,219   Gas burner mantle holder, Gabriel & Stubbers   777,199
bers 777,199 Gas burner mantle holder, J. Stubbers 777,267 Gas burner mantle holder, J. Stubbers 777,267 Gas operating apparatus, W. H. & G. E.
Gas generator, acetylene, Warlick & Bucher 777,367
Gases of blast furnaces, generators, etc.,
technil
Clate D Donle
Gear jig. M. L. King
Glass bottles or other vessels, machine for
Globe, S. O. Bichardson, Jr
Grain drill, D. A. Moon 777,123
Grinding machine, H. Kenyon
ornding machine, H. Kenyon 777,407 Grinding pill, L. E. Gaisser 177,410 Grinding picker cylinder teeth, machine for, 777,410 Gunnery correcting device, automatic, E. W. 777,508 Hubbard, 777,508
Guinery correcting device, automatic, E. W. Hubbard, Juster cleaner, M. C. Cewies



Veeder Counters egister reciproca rements or rev s. Cut full sise.

oklet Pree VEEDER MFG. CO. Hartford, Conn. Cyclometers, Odometers, Tuchometers, Counters and Fine Custines.





"We Clean One Boiler-Free"



or a free trial. It has taken barrows of scale free chiers thought clean and cleaned (?) by other devices WM. B. PIERCE CO. 319 Washington Street, Buffale, N. V. Reliability

& BOWEN MOTOR was the only machine in its class to obtain the total of 100 marks for R R L L A B I L I Ty, running the two days of the trial withous a stop. No crank or handle is used







ose automatically a correct and mous record in ink of the temperature weekly chart. dardised and fully guaranteed.
THE DRAPER SFG. CO.
152 Front St., New York

MOVING PICTURE MACHINES KLEINE OPTICAL CO. A Desirable Hollday Gift.
DRAPER'S
Recording Thermometer

Airst & Wessel
Airst & Wessel
Airst & Wessel
Airst & A. Bewier
Hilling end clearer, A. E. Bensen
Hilling replenishing, B. Crossley
stop motion, G. Goodline
wort fork and west fork grid, wear
, T. Pickle, Campbell & Berg
atting wheel Sanges, device for, S. E.
ceil, A. Schweitzer
, Hiffing, B. Piek
ag, J. C. Lighthouse
rane, R. L. Hardwick
poliveriser, harnyard, D. Upion
ps appliance, C. Rigolia
hars, machine for twinting fat, G.
diblom rota, apparatus for removing scales. B. Beley vivels, making, G. B. Tuffey the and rail fastening, H. S. Buris-chlorid, apparatus for making, M. Douane machine, cow, Howell & McRennie, tc., roller support for use in, Without district entire to the contact device the contact device the contact device the contact instruments, expression mechanisms of the contact instruments, sound regulator auto-pseumatic. O Gelnay unade, dog. W. H. Dusenbary unade, 177,274

777,306 777,830 777,861

177,110 277,343 TTT,250

777,150 777,517 777,084

PRACTICAL ARTICLES ON

Experimental

Electro-Chemistry

By N. MONROE HOPKINS, Ph.D.

Assistant Professor of Chemistry in the George Washington University, Washington, D. C.

ARE APPEARING IN THE

Scientific American Supplement

The articles are specially prepared for us. They describe simply, and clearly experiments in electro-chemistry with easily constructed apparatus. Intelligible and lucid drawings and photographs accompany the articles. The entire series, when complete, will constitute a splendid manual of electro-chemistry. The instruments described have been used by

the author in making the experiments that we explain, so that every student may be assured of their operativeness.

Each number of the SUPPLEMENT costs 10 cents by mail. Send us \$5.00 for a year's subscription and be sure to receive all the papers containing the articles.

MUNN & CO., Publishers & 361 Broadway, New York



# THE ITHACA Radiator Footwarmer \$2.50 BODIATOR FOOTWARMER CO. Bopt. 11, 17HACA, N. Y.

NOW READY

Bound Volume

## SCIENTIFIC AMERICA BUILDING MONTHL'

VOLUME No. 58 July to December, 1904

A Monthly Magazine of Domestic Arch tecture Sumptuously Illustrated

272 Illustrations 6 Covers in Tine

PRICE OF SEMI-ANNUAL VOLUM

"Rildysart," the Country Seat of Paniel O'Da Mag., Deal Seach, N. J. The Estate of Henry W. Foor, Enq., Tuxedo, N. Y. Canntry House of Stanford White, Heq., 8t James N. Y.

bury, N. V.

partments: The usual Interesting Description of the found in their accustomed places

	Scientific
04	Punch stripper, Reynders & Sears 777,541
K	Punch etripper, Rayadors & Sears
	Posch stripper, Reynders & Sears
73	Rail Joint, L. A. Bundy
3	Rail loint, B. Caha 777.40
	Rail joint, G. B. Hunter 777,63 Rail joint plate, J. S. Hoerner 777,25 Rail joint shoe and clamp, J. B. Andersen 777,765
3	Balls to cross the mount for securing track, W. P. Phentx
3	Railway construction, Kifer & Miller 777,42 Railway crossing, G. W. Laucaster 777,42
1	Ballway electrical distribution system, elec- tric, J. H. Hallberg 777,00; Ballway gate, G. W. Thorn 777,15
3	Railway gate, G. W. Thorn 777,15 Railway gate, Lacy & Rogers 777,518 Railway passeager vehicle, G. Gibbs 777,518 Railway, pleasure, Ritddle & Shuck. 777,306
	Rafiway, picasure, Riddle & Shuck
1	Halls to cross tice, means for securing track,  W. B. Phenix. TTT, 22 Railway construction, Kifer & Milber. TTT, 22 Railway electrical distribution system, elec- tric, J. H. Hallberg. TT, 691, 777, 695 Railway gate, G. W. Thorn. TTT, 507 Railway gate, Lacy & Rogers. TTT, 517 Railway paisenger vehicle, G. Gibbs. TTT, 52 Railway, pleasure, Riddle & Shuck. TTT, 507 Railway ratio, device for applying indicating their position on or off, Templeman & Gough. TT, 557
5	Gough T777. AS Bailway agents C. B. Cueper T777. 60 Bailway signal device, R. Avery 777. 60 Bailway tie plats, W. F. Gould 777. 50 Bail
	Rake, Nee Stalk rake,
	Reciprocating engine, C. King 777,108
5	Registering apparatus, H. Hollerith 777,206
3	Remarkance, Variance Boncetve, T. B. Rm- raide Becontat, H. H. Cutler 777, 266 Rhecontat, W. L. Schmidt 777, 458 Rhecontat, Keeney & Rhine 777, 638 Rhecontat, Keeney & Rhine 777, 637
3	Rhecetat, W. L. Schmidt
d	Riscoutat, W. J. Committed States of the Committed Sta
R	Rock drill valve, T. J. Murphy
a	Rotary engine, W. Wyand
	Rotary motor, J. Osvetimsky
ą	Rotary motor, J. Osvetimsky 777,30 Rubber beels, making, R. E. Foster 777,65 Sad iron holder, M. A. Tolin Safe slarm, mechanical, E. Rebischung 777,540
a	Sand blast machine, G. R. A. Gutmann 777,205
d	Sand hopper mechanism for tramway vehi- cles, etc., J. Griffiths 777,060 Sander, pacumatic, J. Farley 777,060 Sash fastener and burglar alarm, B. T. Kav-
d 7	
0	Hash fastener and tightener, adjustable, N.
2	8. Hillyard 777,000 Saw carriage power set works, Tullock & Barnes 777,318 Sawmill set works, T. S. Wilkin 777,223
	Sawmill set works, T. S. Wilkin 777,223 Sawing apparatus, V. Pfaff 777,525 Scale, weighing, J. E. Cochras 777,00
	Bawing apparatas, V. Pfaff 777,58 Beale, weighing, J. E. Cochrau 777,603 Serew threading die, A. J. Smart 777,445 Seal, sheet metal, F. W. Brocks 777,53 Bealing cap, bottle, A. A. Wood 777,168
	Search light projectors, pretective disappear-
	B. Hillyard Bew carriage power set works, Tullock & 777,508 Barnes & 777,203 Bawmill set works, T. S. Wilkin 777,203 Bawling apparatus, V. Ptaff 777,203 Bawling apparatus, V. Ptaff 777,603 Becale, welghing, J. E. Cochram 777,604 Becale, welghing, J. E. Cochram 777,604 Becale, sheet metal, F. W. Brooks 777,604 Besting cap, bottle, A. A. Wood 777,508 Besting cap, bottle, A. A. Wood 777,508 Besting pattern for, B. H. Schulz Bewing machine for forming groups of attiches, J. J. Suillyan 777,504 Bewing machine for forming groups of Sewing machine for forming groups of Sewing machine benefitching attachment, T. Sewing machine for forming groups of Tit,508 Bewing machine benefitching attachment, T. Sewing machine benefitching attachment, T. Sewing machine for forming attachment, T. S
3	Sewer trap. W. Hunt Sewing machine for forming groups of 777,660 setitches, J. J. Bullivan Sewing machine hemstliching attachment. G. W. Freeman. 777,661
	G. W. Freeman  Sewing machine needle, W. Y. A. Boardman 777,061  Sewing machine, signag stirch, L. Bulasty . 777,074  Shade cord attachment, window, A. H. Ecd-
_	Shade cord attachment, window, A. H. Red- heffer 777,140
	Shade relier attachment, apring, E. F. Harts- horn 777.004
	born born attachment, apring, S. F. Harts- born Tr. C. B. Moston Tr. C. S.
	Sharpener, knife, P. J. Neerup
N	Sharpener, Enife, F. J. Neerup TT., 438 Sharpening attachment, cutting tool, F. Watkins Watkins Watkins T. T. 1988 Sharpening machine, twitting tool, F. T. 268 Sharpening machine, twitting tool, F. T. 267 Sheers, C. O. Bergmark T. 1988 Shelf for lockers, etc., adjustable, G. Holden TT. 268 Shelf for lockers, etc., adjustable, G. Holden TT. 268 Shelf for lockers, etc., adjustable, G. Holden TT. 268 Shelf for lockers, etc., adjustable, G. Holden TT. 268 Shelf for lockers, etc., adjustable, G. Holden TT. 268 Shelf fastener, H. O. Stubbs TT. 268 Shelf she attachment, S. A. Hartman TT. 768 Sign, C. B. Stuart W. Somber TT. 368 Sign, C. B. Stuart TT. 368 Sign, C. B. Stuart TT. 368 Sign, G. M. Stubbs TT. 368 Sing, C. M. Shelf TT. 368 Smoke house, J. J. Yuncker TT. 368 Smoke house, J. J. Walscheld TT. 368 Stand. See Umbreit stand Stand. See Umbreit stand Stand. See Umbreit stand Stand. See Umbreit stand Stands Scander, Smeetic W. Aahert TT. 377, 378 Steamer, Sonseutic W. Aahert TT. 377, 377 Stone Composition for use in producing ar- tificial, J. C. McCleanhan TT. 377, 387
	Sheirs, C. O. Bergmark
Y	Shoe tree or stretcher, F. Drew 777,563
	Sign, U. B. Stuart
	Slack adjuster, P. Hien
de.	Smoke house, J. J. Yuncker
	Speed Endicator, C. G. B. Holman
8	Stair tread, A. A. Spadone
	Stand. See Umbrella stand. Stands fooding device, W. McMurray 777,218
E	Steamer, domestic, W. Ashert
	Stone building block, artificial, E. L. Brown-
ıy.	Stone, composition for use in producing ar- tificial, J. C. McCleashan
	Stoker, inechanical, V. Bachman Stone building block, artificial, E. L. Brownson Stone, composition for use in producing artificial, J. C. Meclenahan
06,	Stovepipe cleaner, W. J. Yeoman
Q.,	Street eweeper, J. H. Baragar
ot-	Switch stand, A. A. Strom
	Tabulater, C. A. Joerissen
ita re-	Tanning, Brown & Smith
be er, he	Telephone attachment, H. G. Addie 777,172
he	Quarrie
ite.	Telephone system, J. G. Roberts
ig.	Telephone toll apparatus, G. A. Long 777,525 Telephone transmitter mouthplece, A. B.
ut, he at,	Oruickshank
ak,	Telephony, apparatus for wireless, S. Musits 777,216
F	Therme electric alarm, A. Haslinger 777,506 Thimbie attachment, F. Ludwigsen 777,117
he	Ticnet case, L. M. Hopkins
rt-	Tire fastening, massive. W. Struck
	Tire, Inflatable vehicle, J. W. Farnoff
ini	Tire, vehicle wheel, C. C. Worthington 777,464 Tire, wheel, A. H. Marks
in	Tooth facing for bridgework or gold plates,
ise	Track gage, O. Hobn
ra-	Tray, sevelving, A. Bruebach
ch	Telephone transmitter mouthpiece, A. B. 177,002 belower transmitter mouthpiece, A. B. 177,007 relephone transmitter annitary attachment, H. Baethig Telephony, apparatus for wireless, S. Musits 177,216 rent cottage, J. B. Parks 177,531 Therme electric alarm, A. Haslinger 177,531 Therme electric alarm, A. Haslinger 177,531 Thimbie attachment, F. Ladwigsen 177,117 Tribot case, L. M. Hophins 177,117 Tribot case, L. M. Hophins 177,117,117 Tric anticing, vehicle, J. W. Farnoff 177,117,117 Tric, vehicle, A. H. Marks 177,226, 177,224 Tric, wheele, A. H. Marks 177,226, 177,227 Tric, which, A. H. Harks 177,228, 177,229 Tric, wheele, A. H. Marks 177,229, 177,220 Tric, the case of the ca
ns ns	Truck, car, J. C. Wands 777,574, 777,575 Tub boop, A. Clausing 777,574, 777,183


#### FOR THE HOLIDAYS

## American Estates and Gardens

4to. 11x13% inches. Illuminated Cover and 275 Illustrations. 340 Pages. Price, \$10.00

#### By BARR FERREE

Editor of Scientific American Building Monthly, Corresponding Member of the American Institute of Architects and of the Royal Institute of British Architects

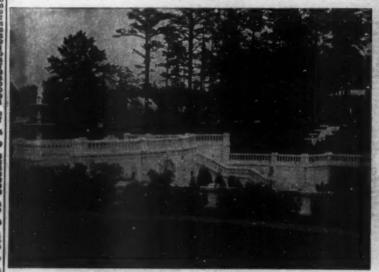

A SUMPTUOUS book dealing with some of the most stately houses and charming gardens in America. The illustrations are in nearly all cases made from original photographs, and are beautifully printed on double coated paper. Attractively bound. This book will prove one of the most salable holiday books of the season, and will fill the wants of those who desire to purchase a luxurious book on our American homes. An illustrated prospectus mailed free on request.

### MUNN & COMPANY

Subscription Dept. O.O.

337 Broadway, New York



The lightest racing skate. Artistically losewood and malconny polish. \$2,00 p

RAYNOND SKATE CO.

Of Sherman St., Challedown District, Heater

WORK SHOPS

of Wood and Metal Worters, with-but steam power, equipped with BARNES' FOOT POWER MACHINERY allow lower bids on jobs, and give greater profit on the work. Machines out on trial if deelred. Cafelog Pres. W. F. A. JOHN BARNES CO.

ELECTRICAL FURNACES ARE fully described in Scientific American Supplements 197. 1374. 1419. 1426. 1421. 1077. Frico III cente each, by mail. Munn & Company. On Roadway, New York City, and all newsdesders.



## Send For It To-Day

You'll find it always convenient to have as a useful and instructive book mentgement & Co.'s You! Catalogue The new edition has 701 pages and is opposedly illustrated. Fochot size 64x 64 ins. Sent by mail for Sic.

MONTGONERY & CO., 105 Palton St., New York City.

Electric Clocks

nt. W. A. Lo. 777,285

SelfWinding

Did you ever investigate the Blodgett System of automatic signal and time clocke?

The first will pay you to do so, Saves time and money for the employer and satisfies the employee.

## SUBSTITUTES FOR COAL

Are described from the techni andpoint in the following Scie American Suppl

by shall:

COMMERCIAL USES OF PEAT.
SCHENTIFIC AMERICAN SUPPLEMENT 1334.
The article enumerates the principal peat bogs and states their financial possibilities.

GERMAN BRIQUETTING MACHINERY IN AMERICA. SCHENTIFIC AMERICAN SUPPLEMENT 1411. A valuable economic report.

A NEW ELECTRICAL PROCESS FOR THE MANUFACTURE OF PEAT FUEL. SCHENTIFIC AMERICAN SUPPLEMENT 1492. The paper fully describes the Bessey process.

LIGNITE, PEAT, AND COAL DUST FUEL. SCIENTIFIC AMERICAN SUPPLE MINT 1426. A careful consideration of German methods.

German methods.

OOR CULTIVATION AND PRATING INDUSTRY IN GERMANY. SCIEN

BRIQUETTING FUEL MATERIAL. SCIENTIFIC AMERICAN SUPPLEMENT 1495. An excellent résumé of the state of the art.

Price to cents each, by mail.

MUNN & COMPANY

NEW YORK

# Hydrozone

Cures

# Sore Throat

A Harmless Antiseptic.

Endorsed by the medical profession. Send ten cents to pay postage on free trial bottle. Sold by Lead-ing Druggists. Not genuine unless label bears my signature:



Write for free booklet on Rational Treat

# MAP OF THE

## WORLD

A beautiful map, valuable for reference, printed on heavy paper, 42x64 ins., mounted on rollers, edges bound in cloth, showing our new island possessions, The Trans-Siberian Railway Pacific Ocean cables, railway lines and other features of Japan, China, Manchuria, Korea and the Far East. Sent on receipt of 25c. in stamps by W. B. Kniskern, PTM., Chicago, Ill.

CHICAGO & NORTH-WESTERN RAILWAY



A MONEY MAKER
Hollow Concrete Building Block
Boot, Fastest, Simplest, Change

PETTYJOHN BROS.

Personally Conducted Tours to

CALIFORNIA COLORADO, UTAH ORECON WASHINGTON and MEXICO

VIA THE

**New York Central** Lines

February, March and May

For parliculars, inquire is New York Central Lat-nt stamp for a copy of coorte. to George H. Dan



Scientific American

conomity fliustrated weekly. Largest cir-oe of my actentific journal. Forms, \$5 a four months, \$1. Sold by all newedsalors. MUNN & CO. 361 Broadway, NewYork

Valve motor disconnecting mechanism,
Howard
Valve, motor drivon, E. G. Howard
Valve, motor drivon, E. G. Howard
Vehicle attachment, motor, H. Hayes
Vehicle, motor, C. Schmidt
Vehicle, welly the state of the vehicle welly the long the vehicle welly thought holder, J. Ayling
Vehicles, etc., slevated platform or a
for motor, W. G. Owen
Vending apparatus, J. C. Coseland
Vending amachine, J. Hoberling
Vending machine, J. Hoberling
Vending machine, J. Hoberling
Vending machine, J. Hoberling
Vending machine, J. Hoberling 777.15

Vending machine, automatic, W. B. Thempon
Viscous substances, machine for working, J.
H. Volkmann
Vise, J. Dodge
Voltag machine, B. F. Chapman
Voting machine air check, B. T. Seeire
Voting machine air check, B. T. Seeire
Wagon bed, M. Roch
Wall mach, M. Roch
Wall mach, hollow, W. E. Hibbard
Washers, making, A. Sang
Water seal trap, B. F. Cowlig
Washers, making, A. Sang
Water seal trap, B. F. Cowlig
Washers, making, A. Serenson
Weighting mechanism for vehicles, etc., C.
Skidmore
Weight sealing apparatus, C. B. Carr
Weight sealing apparatus, C. B. Carr
Weil drilling machine, A. T. Wilson
Well making machinery, portable, C. E.
Glonn

777,350 777,330

Olem Crawciica M. O. Friker Whip socket and rein helder, combined, I. D. Cady Whip socket lead rein helder, combined, I. D. Cady Whip socket lecking, A. Nelison Winding machine, cop. W. E. Hooper Window with stilding sashes, P. Kupelwisser Wire cutter, E. A. Ironside Wire working tool, A. M. McLeran Wire working tool, A. M. McLeran Wire working tool, combination, A. M. McLeran Leran Wire working tool, combination, A. Leran
Wrench, J. N. Noyer
Wrench, G. & J. Strehl
Wrench, R. Vrouman
T-rar tube, R. Friedlander

#### DESIGNS

Advertising label, W. J. Dietrich. 37,260 to 37,263
Award ribbons and declarations, blank for official, M. J. Lowenstein 37,266
Braid, A. H. Grossenbach 37,266
Gas burner, J. Lederev 37,266
Pattern, arabesque, E. I. Denny 37,266

#### TRADE MARKS.

Anewthetic, localing the large of the large 43,50 48,85 Cigars, T. H. Davie, Blum
Dress shields, Levi & Blum
Figurea, miniature, J. Wasamaker
Flour, Galban & Co.
Hair tonics, M. Kraus
Hats, Heath & Kraus
Hats and caps, Raymond & Torwegge Hat
Katherturing Co.
Kathenfleaturing Co.
Kathenfleaturing Co.
Galbane Co.
G 43,827 48,863 Powder, insect, 8: new and diseases, 8: Remedies for evitain named diseases, 43,842 Remedies for pulmonary and infectious diseases, A. G. Meyer 43,841 Remedy for exems, E. L. Jenkins 43,842 Remedy for exems, E. L. Jenkins 43,842 Rilk fabrics, woven, Phalanx Silk Mill 43,832 Pharmacy Cb. Ventilators, P. Evans 43,852 Veterinary Imment, H. McWhinnis 43,852 Veterinary Imment, H. McWhinnis 43,853 Visea, bench, Prentiss Vise Cb. 45,855 Materpool dress fabrics, S. D. French & 43,855 Cb. 43,841 43,840 43,848 43,820

LABELS. "Aligier Patent Button and Button Faston-er," for buttons and button fasteners, Grand Rapids Novelty Manufacturing. "Apollo," for cigars, M. A. Cauley 'Ayrshire Creamery," for butter, H. C. Chris-tians Co. "E. Poncelet Freres, Vermouth Francis," for vermouth, J. Clavel Wing & Cordial 11,686 "E. Poncelet Frerea, Vermouth Francala," for vermouth, J. Clavel Wing & Cordial Value." for a game, A. J. Ditman "Naptha," for soap, Lauta Broak & Co. "Nermana Nature" greatest Tonic," for medical Nermana Nature" greatest Tonic," for medical Value of the Communication of the Commun 11,688 11,688 11,677 11,688 11,00 11,668 11,681 for flour, B. F. Glover & Son Guil," for floor, B. F. Glover & Son.
Oom. Co.
Cilght." for floor, B. F. Glover & Son.
Oom. Co.
Ever Ready," for mantles, Cluster Gas
Aght Co.
The Color of the C

#### PRINTS

"Beaver Wall Plaster," for wall plaster, S.
Q. Fulton
"Manning's Trade-Mark Coffee," for coffee,
W. W. Manning,
"Progress Wall Plaster," for wall plaster,
S. Q. Fultos
"Use Lucas Paints," for paint, J. Lecas &
Co. 1,150

Oansdian patants may now be obtained by the ventors for any of the inventions named in the going list. For terms and ferther parties cadress from & Co., 30t Broadway. New Yor.

CE MACHINES Carline Enginee, From Mechinery. THE VILIT

CHEMICAL EXAMINATIONS REAL

MODELS

MODELS & EXPERIMENTAL WORK Inventions developed, Special Machiners E. V. BILLAARD, Fex Bidg., Franklin Square, New York

DRYING MACHINES, S. H. WORREL

MODEL AND EXPERIMENTAL WORK.
Bioctrical and Mechanical Instruments. Rusall Mach'y.
EDWARD KLEINSCHMIDT. 82 W. Sreedway, New York

Dies, Teels and Special Machines, Mond Experimental Work. General Machine Work. Pt. J. BENDER & SONS, Inc. W Frankfort St. New

NVENTORS We are a superior design to the superior superio

Print relicing for some En

Electrical Engineering

and Experimental Work of Every Description
We have every facility for producing first-class work
groundly. Our factory is emigraed with modern ma-

C. F. SPLITDORP INSTRUMENT CAKING SCALL WAR

Extension Ball-Bearing 8

SAVE FIRE LOSS

So supple a child can use it.
Write for information.
BABGER FIRE EXTINGUISM
67 Pertland St., Besten, Mr.

Bubler's Popular Electrician

5 MONTHS No.

Brientific but not technical.

Rdited by expert electricians.

50c. per year Dept. S. Lynn, Mass-



Telegraphy

EXPERT AND MACHIN

STAR ELECTRIC PURE WORKS

PRINTING THAT BRINGS RESULTS PAYS YOU

Fe attend to every detail of Writing, Illustrating, Printing and Binding Bookless. Inventors and manufacturors withing to sell or exploit their passess can do at very effectively by good circulars and bookless. Estimates furnished. Send 8s. postage for samples and handsome souvenir engraving of 3s. Louis Exposition, 14x20. on 20x24 paper.

C. L. WRIGHT 6- CO., 132-4-6 West 14th Street, New York.

# The Constitution of Portland Cement

is chemically and physically discussed in SCIENTIFIC AMERICAN SUPPLEMENTS 1510 and 1511. Price 10 cents each by mail. Order from your newsdealer or from

MUNN & CO. 361 BROADWAY, NEW YORK



REACHED ONLY BY

NEW JERSEY CENTRAL

FINEST LINKS BEST HOTELS

**EXCLUSIVE PATRONAGE** 

**GBOOKLET ON APPLICATION TO** C. M. BURT, GENERAL PASSENGER ACENT # 143 LIBERTY STREET NEW YORK CITY. # # # #

DON'T BUY GASOLINE ENGINES





Speed about twenty miles per hour. Will climb all co

WALTHAM MANUFACTURING CO.



## CHARTER

GAS and GASOLIE For All Work. Stationaries, Portables, Economics, ern, Sawing & Sout Outlies. Send for Oxfologue and Testim

State Year Power Needs.



conflor from types their original, we will shall complete displacety on the spiritual original or will shall complete displacety on the spiritual original or will spiritual displacets, on one (10). From Sf. Ab law 100 From Sf.





## U. S. A. LIQUID PISTOL

I stop the most visions day

7. Frightly sit to carry without

10 flatings. Thus and orderings by

10 things. Dous and orderings by

10 things. Lothe from any fight. He carefdges

10 things. Lothe from any fight.

With This Tool You Will Always



Wall made, well finished, and will stand the test for secured. It is independently for the carpenter's kit 1000ELL-PRATT COMPANY Greenfold, Make



### The Right Kind of a Motor

iand or water. Salisbury Double inder Motor 64 g b. Water Jacket inders and Heed, Aluminum Crankes, 8elf-Oiling, Nickel Steel Valves, Forged Steel Shaft. Hallsbury Motors are Reliable. Prices mod-

BUFFALO ENGINE CO., Mirs. 272-274 Michigan St., Bulfalo, H. Y.

## **Everything for the Automobile**

Auto Fur Coats, - - \$20.00 up Auto Rubber Coats, - - 6.00 up Auto Cravanette Clothing. Yankee Spark Plugs. - 2.00 Yankee Electrical Cut-Out Switches. - 1.50

Big Free Catalog L J. WILLIS CO., 2 Park Place, N. Y.

\$3.00 fed of contings and parts for the "MODEL" DYNAMO



ESSOP STEEL CO

## The Orient Surrey A WONDERFUL HELP FOR BUSY MEN

A fresh card comes to the fresh every day, in the elegant leather Vest-pocket Case, which carried dates for 2 or 4 weeks shead. Extra cards for things to be retained. It is not baidy. White B. May - Surper School Conference of the C

#### **AN IDEAL CONSTANT REMINDER**

The Other Device Answers Its Furpose

Und by thousands of wide-seven be built for the U. S. A grantical system for measurants. Takes case of all appointments and duties automate habits. Travelable to all wise would be prount, systematic or successfully.

From include the rest of 1984 and all of 1985.

Real Seal Seal Sealer Case, cards, Quot. Oak Tray

Real Seal Sealer Case, cards, Quot. Oak Tray

Sando Sea. Occurrent Sealer Case, cards, All Tray

Sando Sea. Occurrent Sealer Case, Cards, Cont. Tray

Sando Sea. Occurrent Sealer Case, Cards, Cont. Tray

Sando Sea. Occurrent Sea. Occur

some tridages. Ger the memorandem habit. It's easy thin Atomicology with a Meminde More.

HOW IT IS USED

Things to be done to-day, jot on face card. Things to be done to-day, jot on face card. Things to help to desire you ustill the card. The face of the fa

LIBRARY,

A FEW AMONG THOUSANDS OF SATISFIED PURCHASCRYS

POCENTIAL STATES OF SATISFIED PURCHASCRYS

CENTRAL ELECTRIC Co., Schenschdyt "Please will be deminded. I come to the fresh of the deminded. Check inclosed for St."

A. CRURCHWARD.

W. L. PRYTIRONE, N. Y. City: "I faind in an extremely limited principle." I faind in an extremely limited principle. The common for the fresh covery day, in the elegrand lensthere year day, in the elegrand lensthere year day, in the elegrand lensthere year. A REVIALNE BROOK, Teronion: "We are more than deserted one, Feb. 28th two, Feb. 28th fore. The Arthur Secretary of the ordered one, Feb. 28th two, Feb. 28th fore. Two Archivestes."



HOWARD L. WILSON, Manufacturer, 73 State St., ROCHESTER, N. Y.



#### The "Kickdrive" Forge

cests no more than the common kind, but is very uncommon, as it has a good foot power drive, allowing the operator to devote both hands to his work. Get a booklet.

SLOTHIN O. PRAGLIN



THE MIETZ & WEIBS KEROSENE
It to 00 H. P.

Though for Continuence of the Continuence of t

CHARLES J. FORD No. 225 Senior Building, Holyoke, Mas

GREAT BURNHAM STEAM PUMP for Feeding Buller, Tank, Pump feer, Water, Oll, Milk, Whiskey, Condensations, Hydraulic Pressure. Deep Well, Mine, etc. Will not Short Stroke or Injuries Leed to No Load. Write for Catalor No. 18.
UNION STRAM PUMP CO., Stattle Creek, M.

# Commercial

TRUCKS

2,000 to 10,000 He Carrying Capacity

Prices and Blue Prints aubmitted upon application



WAGONS 10 to 1,800 lbs. Car-rying Capacity

rial bodies to meet

POPE MOTOR CAR CO. Waverley Department Indianapolis, Ind., U. S. A.

### AMERICAN JUMP SPARK IGNITION OUTFITS



OUR NEW SKELETON

WATCH READY FOR

MARINE AUTOMOBILE

WILLIAM H. RAU 1022 Cheetn



STATIONARY MOTORCYCLE

AMERICAN COIL COMPANY, Somerville, Mac

Wongland WATCHES

An Ideal Christmas **Gift** 

Our New Shelsten Watch not only shows you the time, but how time is made. Accurate time at that. Ready for delivery Colebor lat. For sale by all Jewelers.

THE NEW ENGLAND WATCH CO. 37 CD 39 Maiden Lane, New York 7 Snew Hill. London, England

THE CHRISTMAS STORY" ILLUSTRATED

From the heautiful raintings of \$189078 "LIFE OF CHRISP."

Just the thing for foliday entertainneents. Send for description.

ILLIAM H. RAU 1022 Chestnut Street FHILADELPHIA PA.

## COLD GALVANIZING




NICKEL

Newark, R. J.

Si William St., R. Y.

Si & 23 S. Canal St.

Chicago.



## LINDSAY. LIGHTS

ENCIRCLE THE GLOBE. Good news travels fast and the merit of INDSAY LIGHTS has won instant cognition wherever there is gas and civili-

Instant adjustment to any pressure, economy in operation, appearance, are points that have put over 60,000 into actual use. Free illustrated book and full particulars can be had on request.

LINDSAY LIGHT COMPANY. Dept. S CHICAGO, U. S. A. Cables "J.INSLITE" Leiber's Code.

All varieties at 10 west ortice. Best Railro Track and Waron or Stock Scales ma Alao 1000 mertal articios, including Sewing Machines, Beryese, Tobic-tele Se Money, Lists Free. CHICAGO SCALE CO., Chicago.



Upright first is the best tooche de substantials, will hark up to flats. The driving hover is struce and positive—the five-step come gives wide range of apost-will drill from 1/16-inch to 54-inch. Read ing matter on request.

B. F. BARNES COMPANY, Rocktors, III.

## THE FINSEN TREATMENT CURES ECZEMA

IF you have sesoms or any skin dissumes or k 10 w of anyone shock. It is Free. It describes this wonderful treatment indurated and endowed by the rulers of four nations and tells how you thendione or pain. Gives plutographs of oursel patients. We coured to H. Hanson, A So. Clark St., Chicago. A. Vans. Leeman, common.



The Finsen Light Institute of America 78 State Street, Chica

THE FRANKLIN MODEL SHOP
Irreview, ansiere mechnisis, schools med colleges furnished with my
bling to motal from a single piece to a comprise working motal
movings and designs worked out from invasion disas. Write the
PARSELL & WEED, 189-181 W. Slet St., New York



WOLVERINE SELP STARTING AND REVERSING

Gasoline Marine Engines 3 to 8 horse power. Launcher 18 to 75.ft. . Write for entalogue WOLVERINE MOTOR WORKS Grand Rapids, Mich., U. S. A. Brooklyn odice, 97 296 St.

Complete Electric Lighting Plant mplete Electric asg.

Price, 684.07
mmo only, for eight 16-c.p.
np., 886.00; Jamps, wire,
tarea, etc., 85.00; just unitle for residences, small factos, yachts, etc. A strictly
than guaranteed outfit, We





GRINDER ACCORDER ACCORDER TO THE STATE OF LINE WAS